



### **Characteristics**

External dimensions : 500 X 925 X 900  
 Stainless steel top 18.10 planetary planetary brushed finish  
 Top thickness : 3 mm  
 body 1 mm in planetary brushed stainless steel  
 Structure : 2 mm in stainless steel  
 Stand with composite feet of 150 adjustable in height  
 folded front edge radius 20 mm  
 Back edge forming a chimney cover  
 Front without any visible screw

### **Top**


Net 30L stainless steel tank thickness 1.5mm  
 Efficiency: >50 kg/h 6x6 frozen french fries  
 Thermostat 180°C positive security 220°C  
 Heating by 7 submerged nozzles and torch burners  
 Security by thermocouple with pilotlight  
 Tank with cold zone + 26/34 with draining tap  
 2 stainless steel baskets dimension : 455x140x130  
 Automatic baskets lifting with timer  
 Power: 30 kW  
 Electric ignition

### **Options :**

infrared heating lamp for storage unit for preequiped salting unit (W042403)  
 gaz connection kit for hose per device (X901405)

### **Base unit**

Construction in stainless steel 18.10  
 Structure 2 mm  
 body 1 mm  
 Front without any visible screw  
 Double skin doors

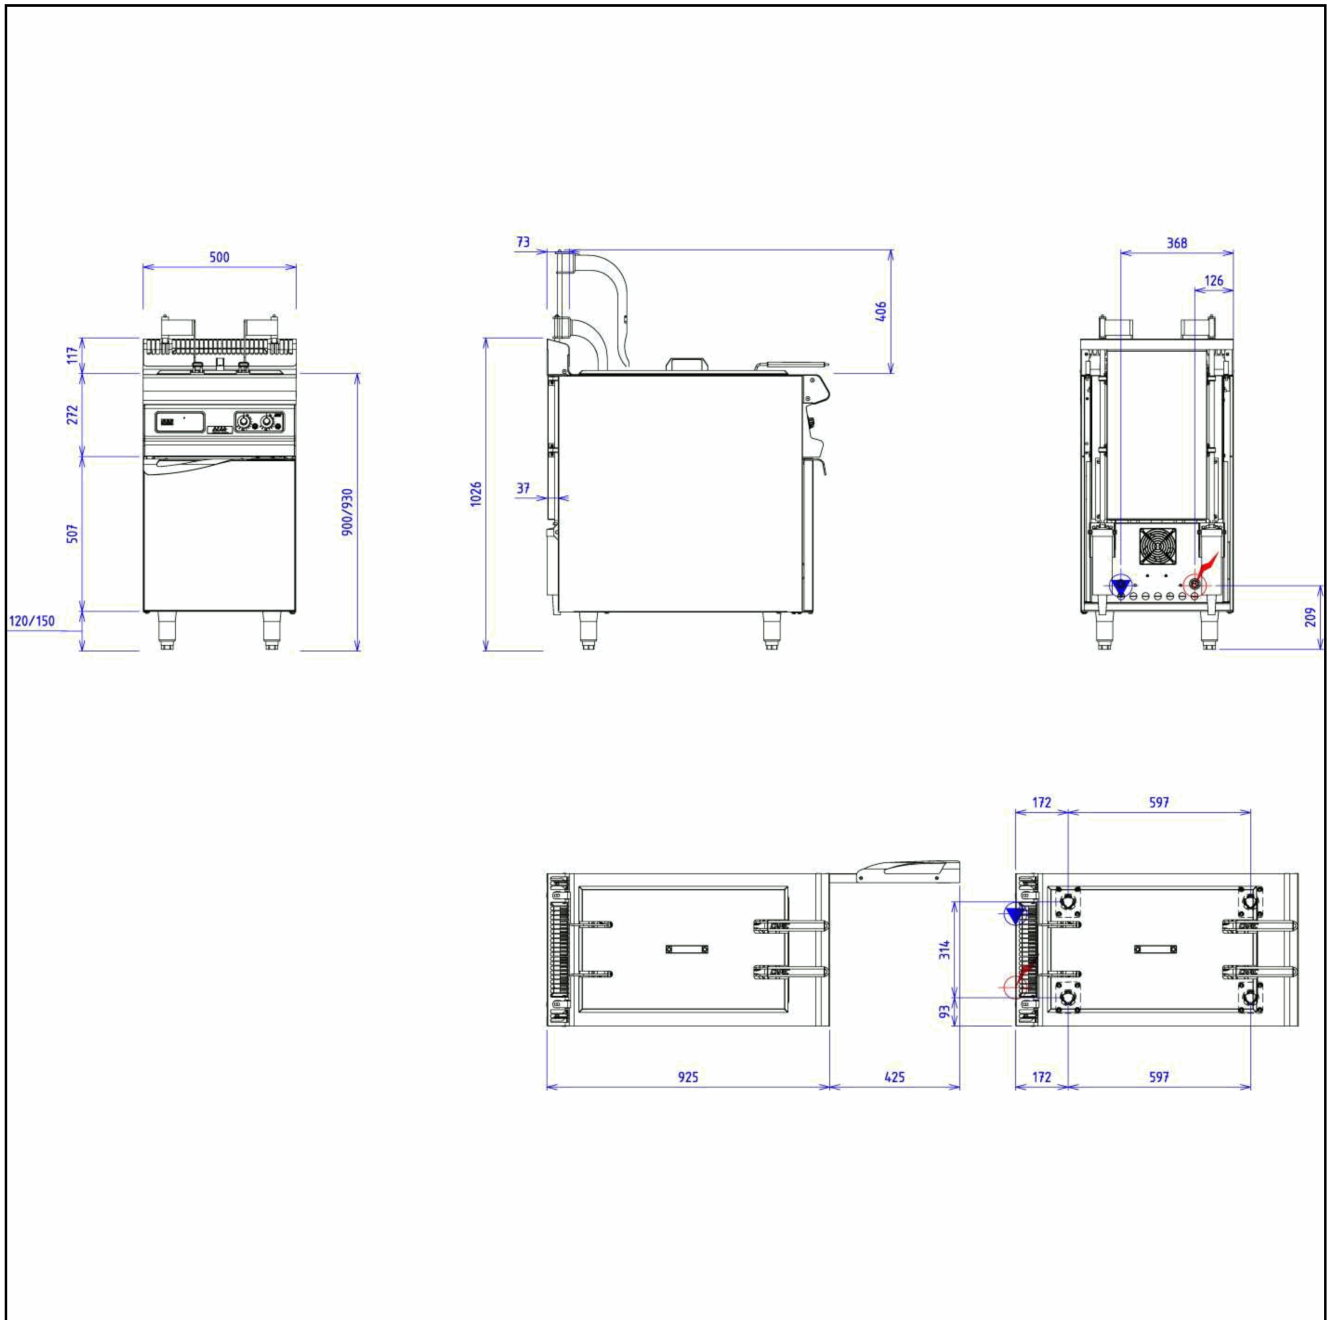

## GAS



Gas power : 30kW

Gas connection : 15/21 MALE TAPERING

Gas appliances complying with standard NF EN 203.EN 437

Gas Directive 2009/142/EC

## ELECTRIC



Electric power : 0.00kW

Elec Réserve : INTERNAL TERMINAL BOARD - Elec fitting : 230V SINGLE

230V SINGLE( Si option électrique sélectionnée)

Electrical devices standard to the norm EN 60-335