



Characteristics

External dimensions : 500 X 925 X 900
 Stainless steel top 18.10 planetary planetary brushed finish
 Top thickness : 3 mm
 body 1 mm in planetary brushed stainless steel
 Structure : 2 mm in stainless steel
 Stand with composite feet of 150 adjustable in height
 folded front edge radius 20 mm
 Back edge forming a chimney cover
 Front without any visible screw

Top


Net 30L stainless steel tank thickness 1.5mm
 Efficiency: >50 kg/h 6x6 frozen french fries
 Thermostat 180°C positive security 220°C
 Heating by 7 submerged nozzles and torch burners
 Security by thermocouple with pilotlight
 Tank with cold zone + 26/34 with draining tap
 1 panier fil inox dimensions : 500x290x200
 Automatic baskets lifting with timer
 Power: 30 kW
 Electric ignition

Options :

gaz connection kit for hose per device (X901405)

Base unit

Construction in stainless steel 18.10
 Structure 2 mm
 body 1 mm
 Front without any visible screw
 Double skin doors

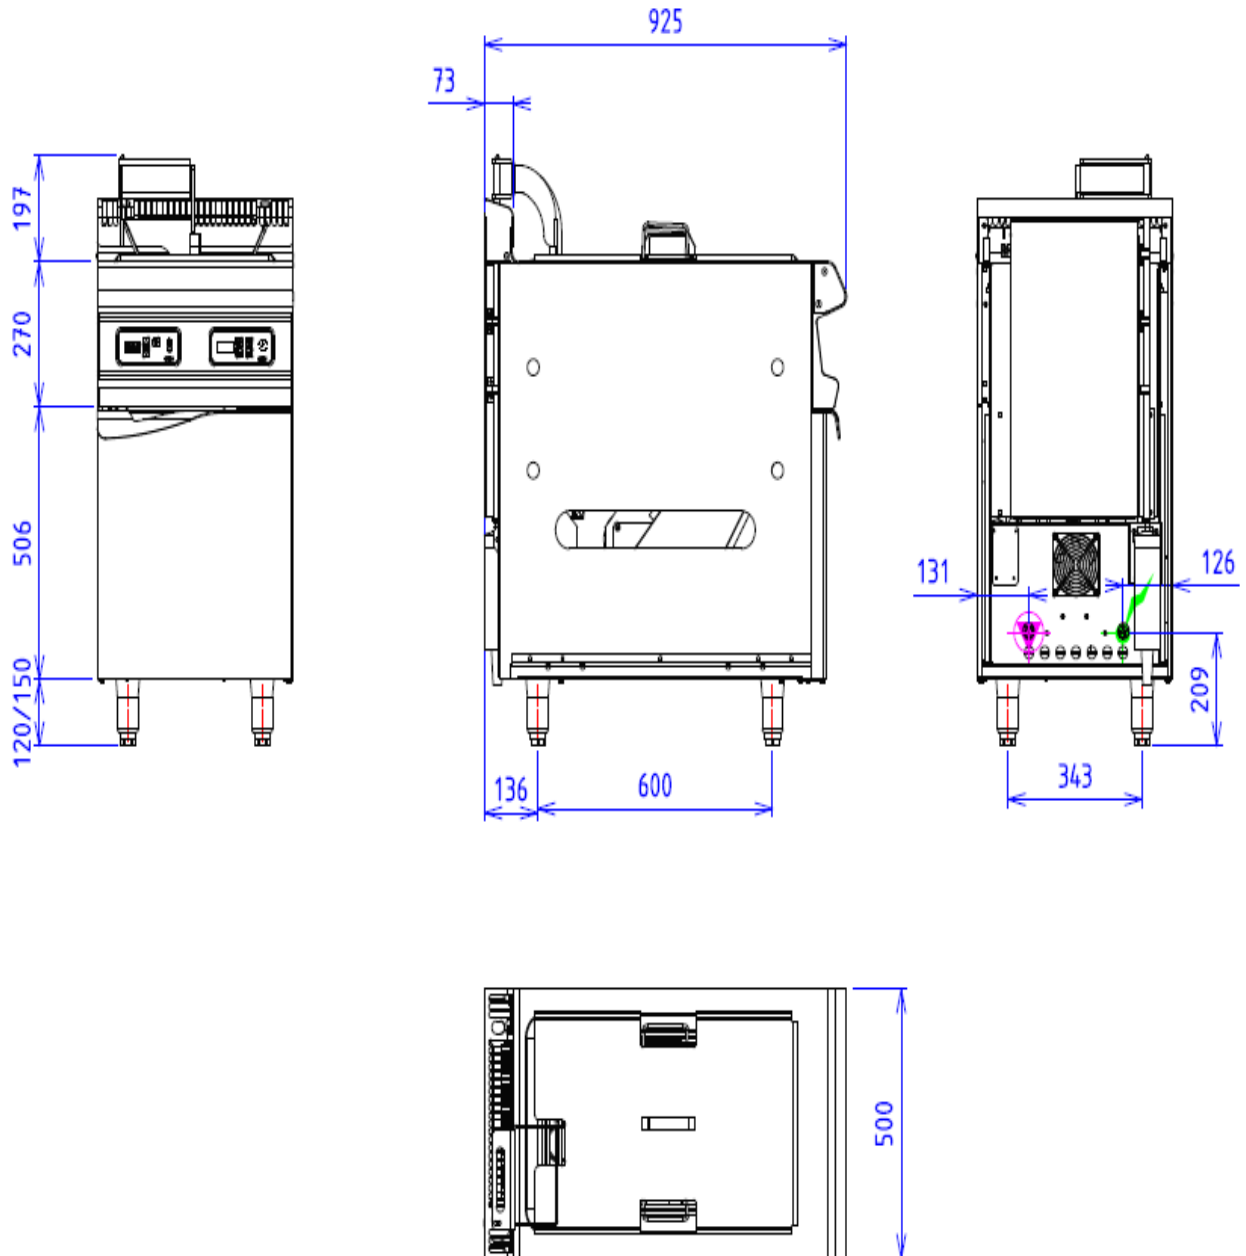

GAS



Gas power : 30kW

Gas connection : 15/21 MALE TAPERING

Gas appliances complying with standard NF EN 203.EN 437

Gas Directive 2009/142/EC

ELECTRIC



Electric power : 0.00kW

Elec Réserve : INTERNAL TERMINAL BOARD - Elec fitting
: 230V SINGLE

Electrical devices standard to the norm EN 60-335