

Characteristics

External dimensions : 1000 X 1000 X 900
 Stainless steel top 18.10 planetary planetary brushed finish
 Top thickness : 3 mm
 body 1 mm in planetary brushed stainless steel
 Structure : 2 mm in stainless steel
 Stand with composite feet of 150 adjustable in height
 folded front edge radius 20 mm
 Back edge forming a chimney cover
 Front without any visible screw

Top


4 open burners
 removable burners with pilot light 4x9kw
 Burner griddles in stainless steel, dimensions : 400x600
 Stamped tank & cleaning tray
 secured and protected commands

Base unit

Construction in stainless steel 18.10
 Structure 2 mm
 body 1 mm
 External dimensions : 800x724x650
 Front without any visible screw
 Dimension of the retort : 650x530x280
 Walls insulated by mineral fibers
 aluminium steam barrier
 Power 5.1kW thermostat 50 à 300°C
 Commutateur et Lighting indicator
 Reinforced stainless steel resistances located
 all around top and bottom
 heating together or separately
 Removable steel bottom 6 mm thickness
 stainless steel lateral walls
 with levels holding griddles
 Door to double wall insulated and balanced
 Provided with one stainless steel griddle GN2/1

Options :

water bowl for burner 9kw (X901404)
 gaz connection kit for hose per device (X901405)
 electric ignition gas burner each other gas burner (X901502)

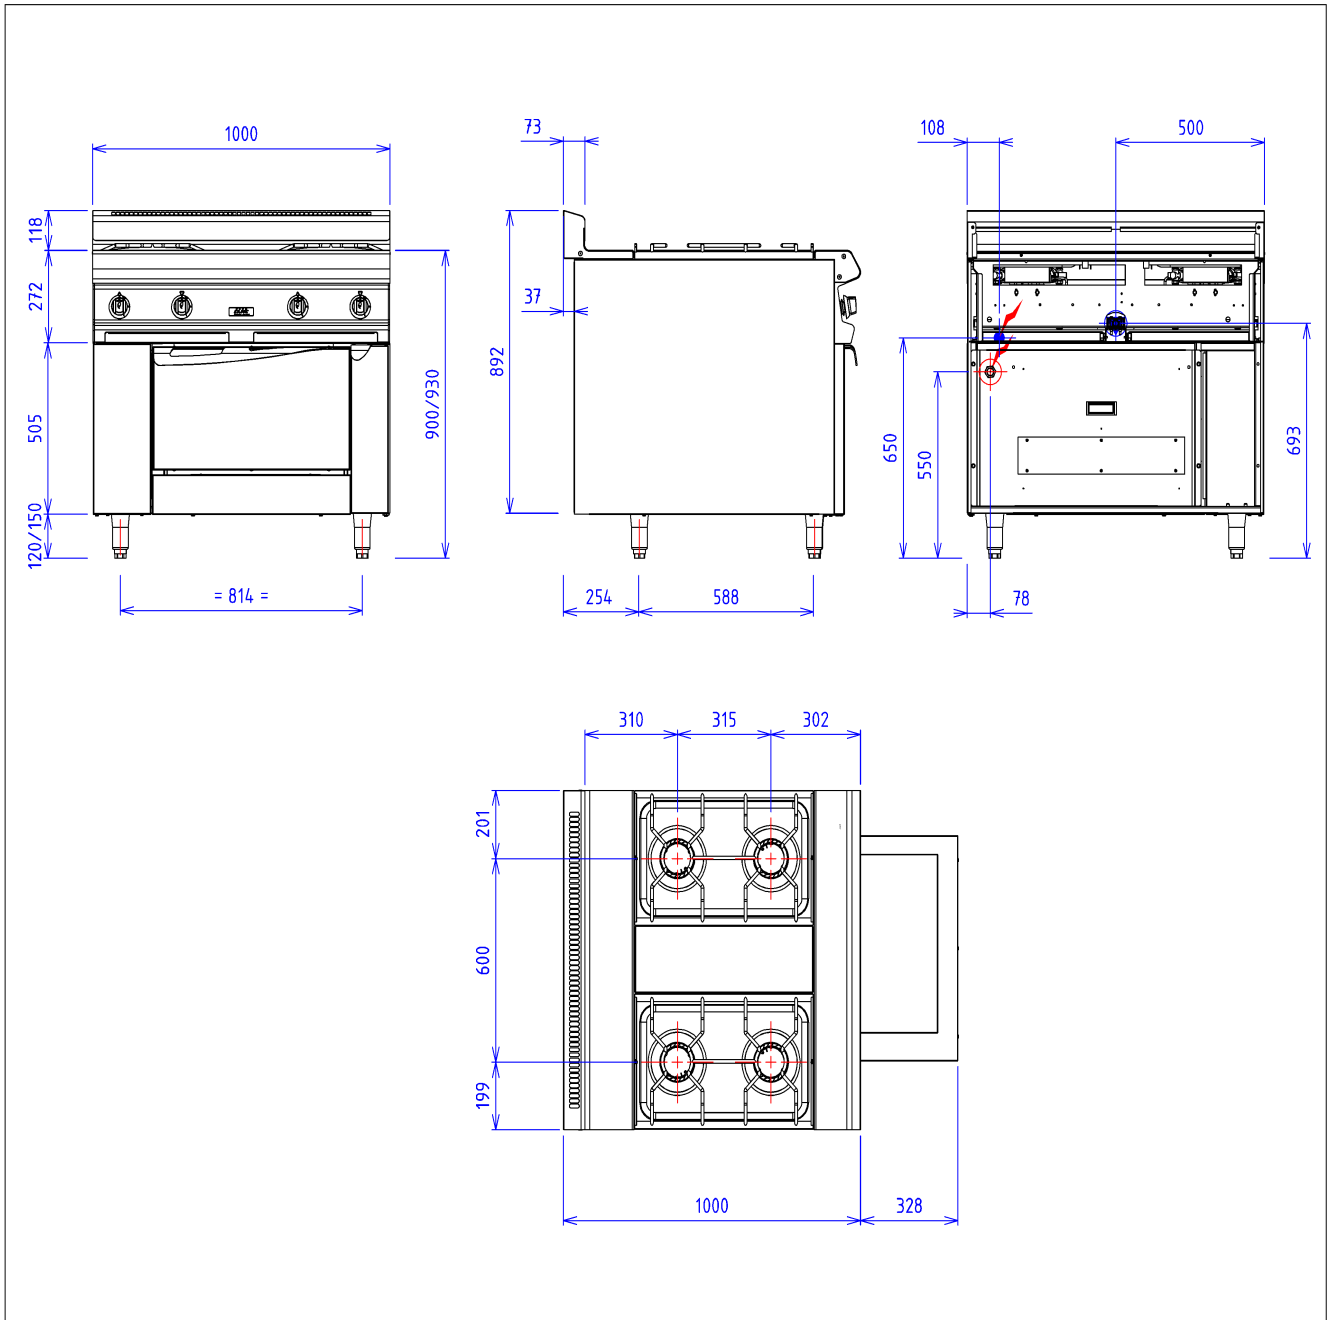

GAS



Gas power : 36kW

Gas connection : 15/21 MALE TAPERING

Gas appliances complying with standard NF EN 203.EN 437

Gas Directive 90/396 / EEC

ELECTRIC



Electric power : 5.10kW

Elec Réserve : INTERNAL TERMINAL BOARD - Elec fitting : 400V THREE

230V SINGLE(Si option électrique sélectionnée)

Electrical devices standard to the norm EN 60-335