

CATERING RANGE BRAISING PAN 80 ELEC.

ELEC TILTING - HW/CW SUPPLY



Characteristics


External dimensions : 1500 X 1000 X 900
 Stainless steel top 18.10 planetary planetary brushed finish
 body 1 mm in planetary brushed stainless steel
 Structure : 2 mm in stainless steel
 Stand with composite feet of 150 adjustable in height
 folded front edge radius 20 mm
 Back edge forming a chimney cover

Top

1 mm stainless steel double lid
 equipment with echtermann hinge
 Tank in stainless steel 18.10 thickness 2 mm
 Bimetal bottom - 12 mm thickness
 Wide radius angles
 Wide spout
 Dimensions : 1350x575x250
 Net capacity : 170 l.
 Power : 27 kW
 Heating by stainless steel armored high performance
 heating elements.
 Hot/Cold water supply
 controlled from front by 1/4 turn tap
 with ceramic components
 Tilting by electric actuator

Options :

removable frame bratt pan 80 (X295003)
 spout strainer for 80 (X295007)
 connection haccp (X295013)
 removable offset spout (X295014)

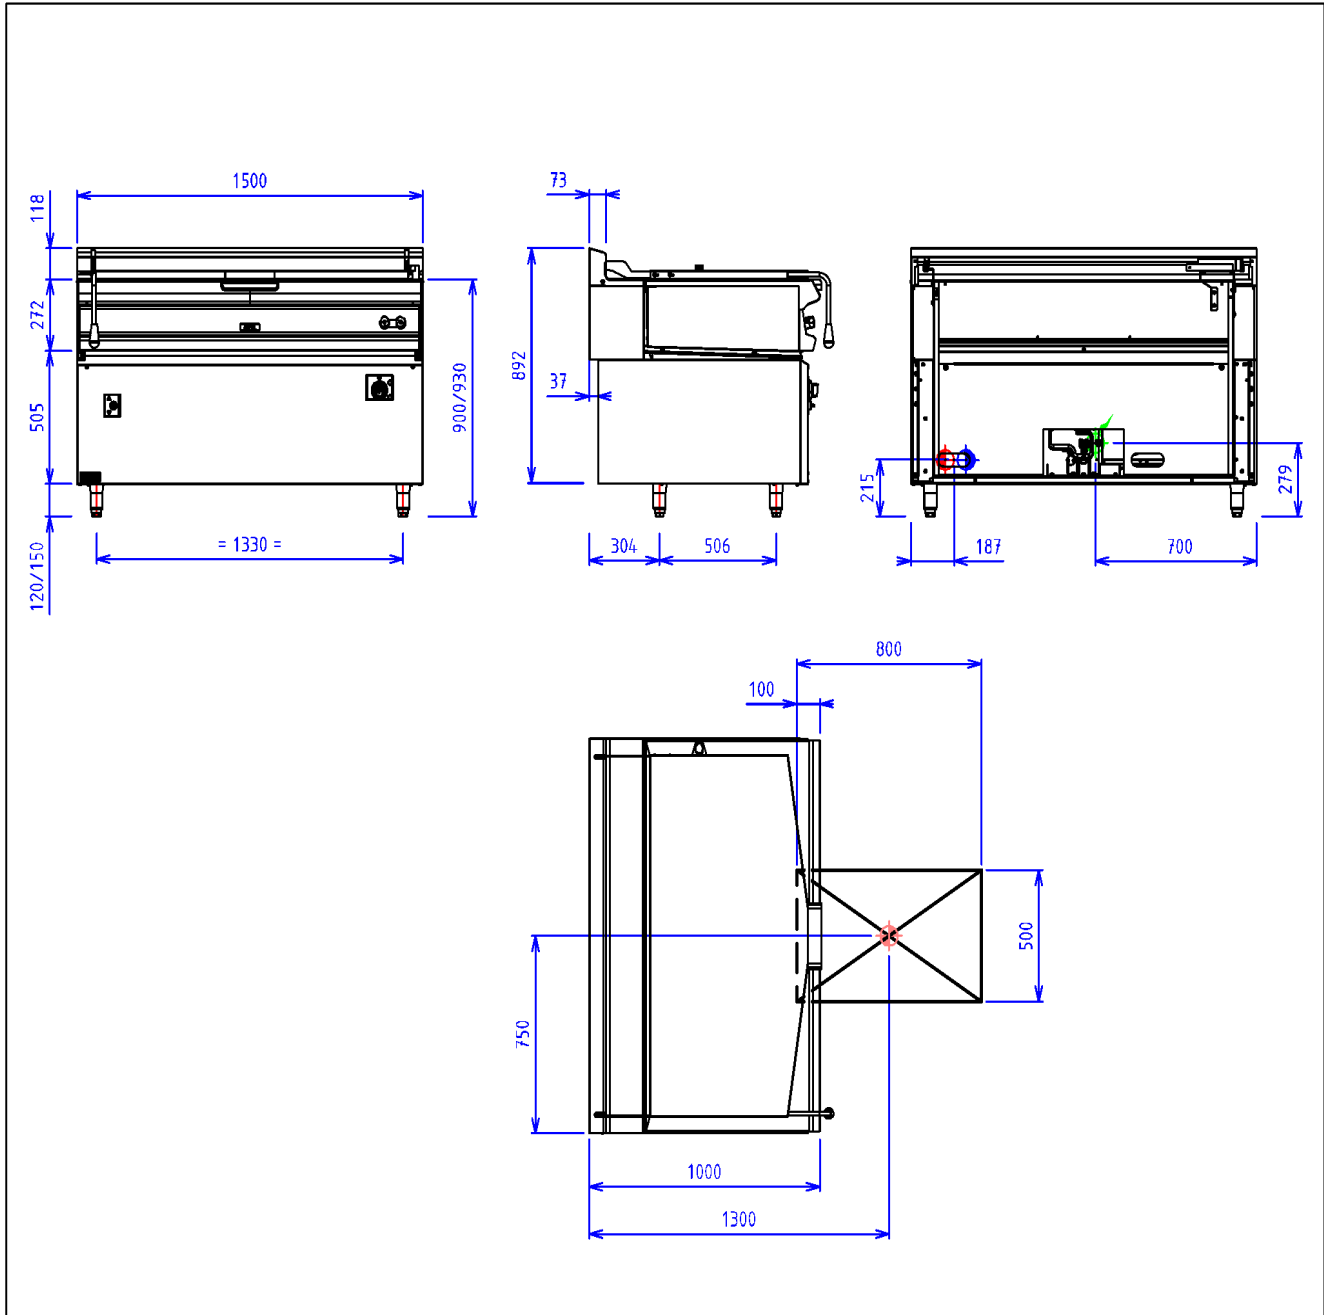

ELECTRIC



Electric power : 27.50kW

Elec Réserve : INTERNAL TERMINAL BOARD - Elec fitting : 400V THREE + NEUTRAL

Electrical devices standard to the norm EN 60-335

WATER/AIR



Hot water fitting : 15/21 FLEXIBLE

Cold water fitting : 15/21 FLEXIBLE