



### Characteristics


External dimensions : 1000 X 1000 X 900  
 Stainless steel top 18.10 planetary planetary brushed finish  
 body 1 mm in planetary brushed stainless steel  
 Structure : 2 mm in stainless steel  
 Stand with composite feet of 150 adjustable in height  
 folded front edge radius 20 mm  
 Back edge forming a chimney cover

### Top

1 mm stainless steel double lid  
 equipment with echtermann hinge  
 Tank in stainless steel 18.10 thickness 2 mm  
 Bimetal bottom - 12 mm thickness  
 Wide radius angles  
 Wide spout  
 Dimensions : 850x575x250  
 Net capacity : 100 l.  
 Power : 20 kW  
 Heating by gas ramps  
 Control be 4-position tap  
 Security pilot and thermocouple  
 Hot/Cold water supply  
 controlled from front by 1/4 turn tap  
 with ceramic components  
 Tilting by electric actuator  
 Electric ignition

### Options :

removable frame bratt pan 50 (X295001)  
 spout strainer for 50 (X295006)  
 connection haccp (X295013)  
 removable offset spout (X295014)  
 therm. control+gas cut+limiterregulation by thermostat (X295020)

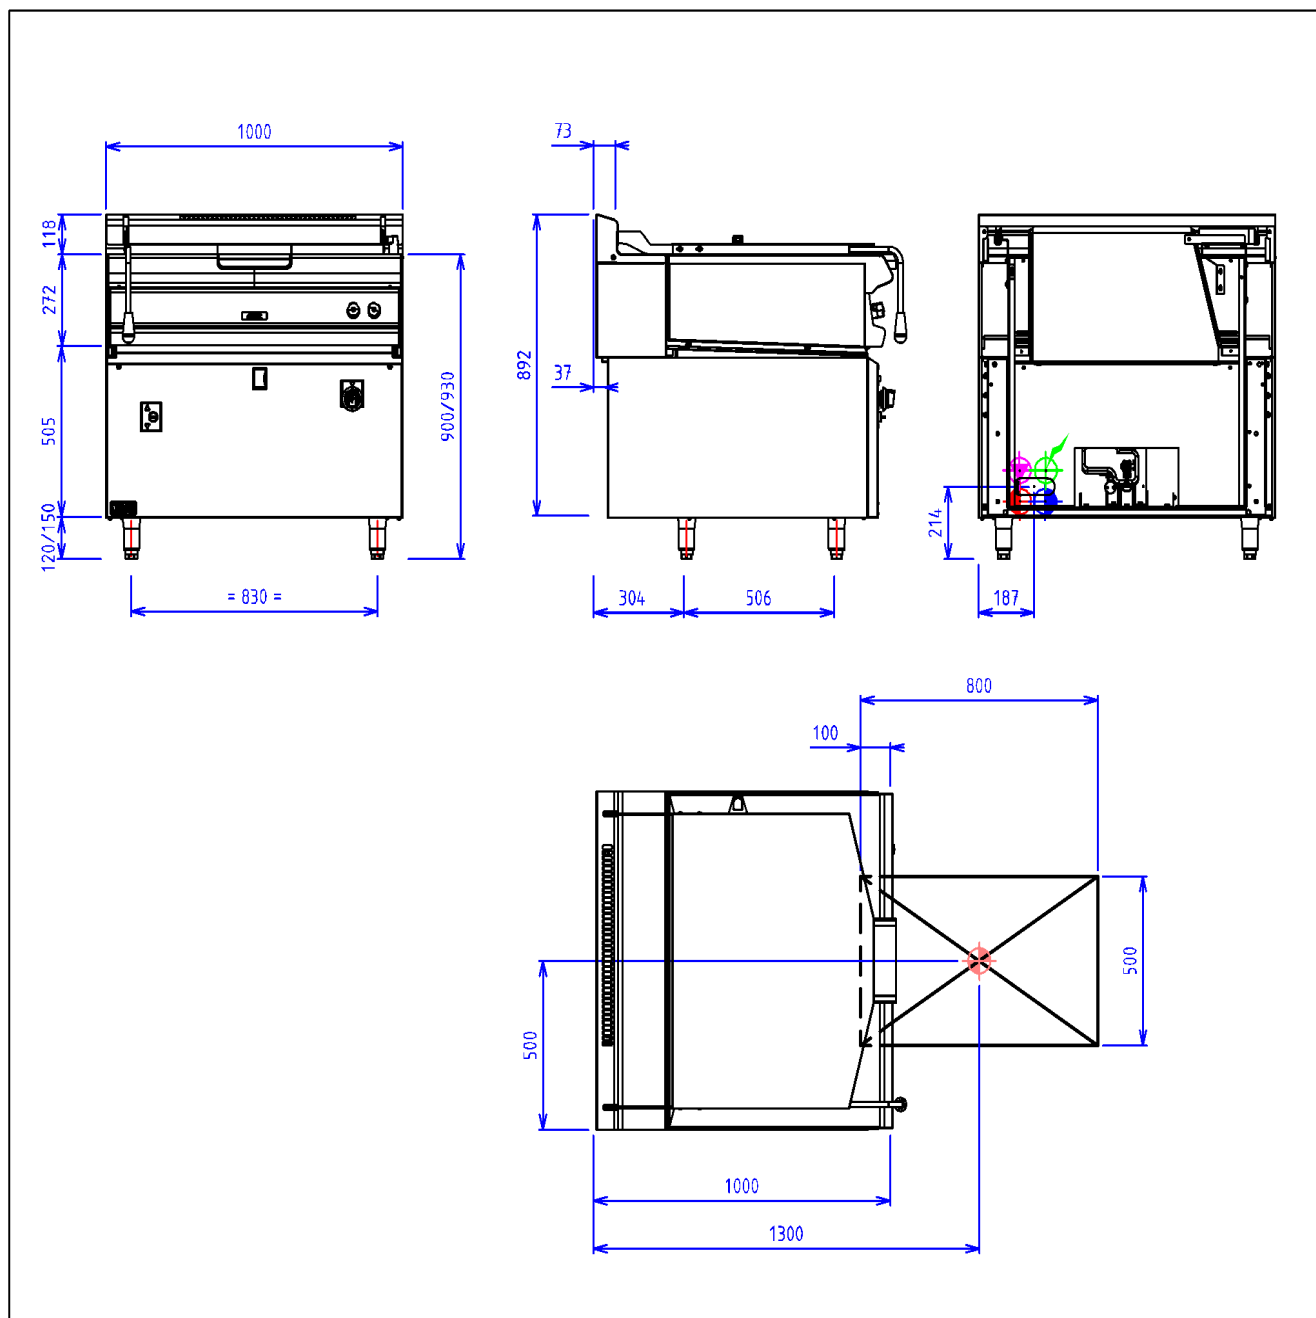

## GAS



Gas power : 20kW

Gas connection : 20/27 MALE TAPERING

Gas appliances complying with standard NF EN 203.EN 437

Gas Directive 90/396 / EEC

## ELECTRIC



Electric power : 0.50kW

Elec Réserve : INTERNAL TERMINAL BOARD - Elec fitting : 230V SINGLE

Electrical devices standard to the norm EN 60-335

## WATER/AIR



Hot water fitting :15/21 FLEXIBLE



Cold water fitting :15/21 FLEXIBLE