

Characteristics

External dimensions : 900 x 800 x 770

Construction in planetary brushed stainless steel 18.11

Retort thickness 2mm

Body structure 1mm, door 1mm, base 2mm

Without base unit

Top

Power : 9,6 kW

20 to 80 meals

Regulation by electronic thermostat 270°C

350°C security, by a ventilation fan

Heating by heating elements

Double glazing glass door, right hinge

5/6 levels GN1/1

Options :


stainless steel stand for r50-150 ac50-150 rege8-12 (X100101)

extra for changing elec current in 3x220v (X100702)

moisture spray (X101001)

5 shelves support spaced of 75 for r or ac50n (X102101)

6 shelves level supports for r or ac50n (X102102)

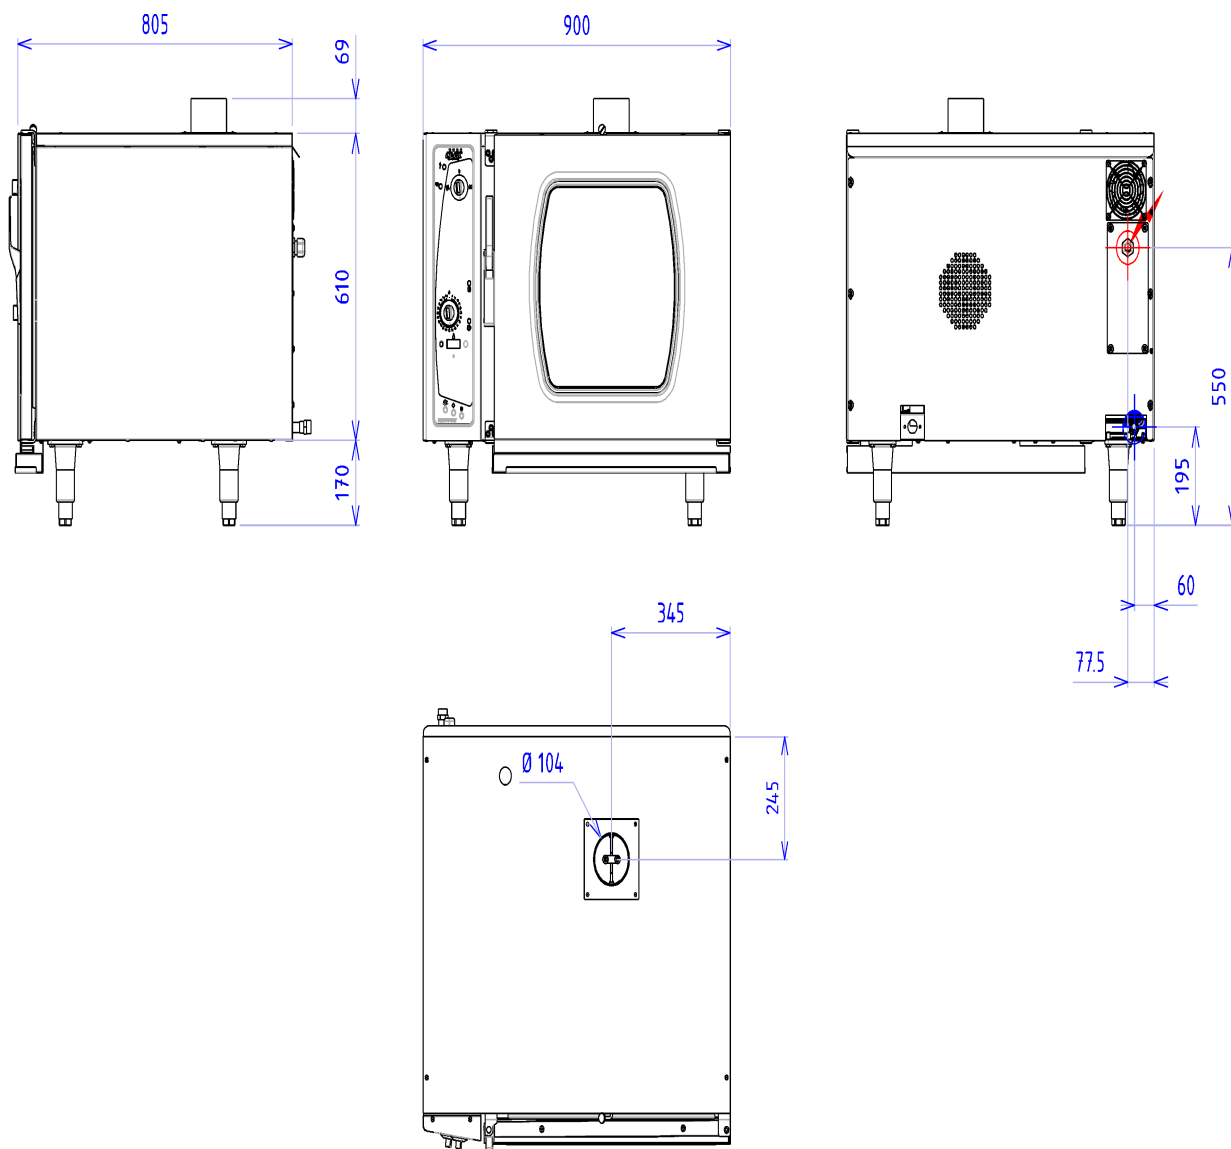

ELECTRIC



Electric power : 9.60kW

Elec Réserve : - Elec fitting : 400V THREE + NEUTRAL

230V SINGLE(Si option électrique sélectionnée)
Electrical devices standard to the norm EN 60-335