



### Characteristics

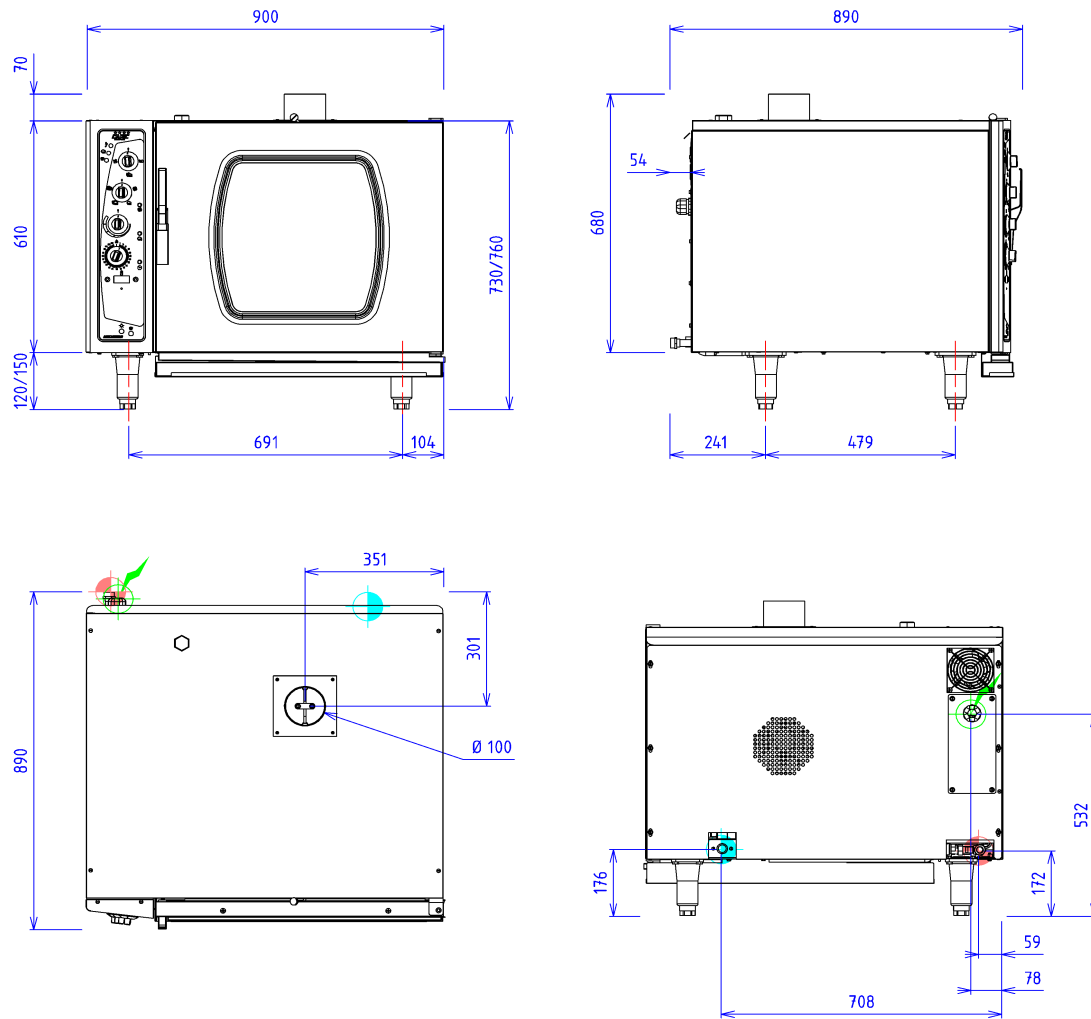
External dimensions : 900 x 800 x 770  
 Construction in planetary brushed stainless steel 18.11  
 Retort thickness 2mm  
 Body structure 1mm, door 1mm, base 2mm  
 Without base unit

### Top

Power : 9,6 kW  
 20 to 80 meals  
 350°C security, by a ventilation fan  
 5/6 levels GN1/1  
 Double glazing glass door, right hinge  
 Production of steam by a steam generator  
 Generator power 4,5kW  
 Electronic thermostat 270°, cooking mode selection  
 Heating by heating elements and steam generator  
 Brightened stainless steel cooking chamber  
 Rounded angles  
 Delivered without internal equipment

### Options :

stainless steel stand for r50-150 ac50-150 rege8-12 (X100101)  
 storage rack gn1/1 (X100102)  
 extra for changing elec current in 3x220v (X100702)  
 5 shelves support spaced of 75 for r or ac50n (X102101)  
 6 shelves level supports for r or ac50n (X102102)

**ELECTRIC**

Electric power : 14.00kW

Elec Réserve : - Elec fitting : 400V THREE + NEUTRAL

Electrical devices standard to the norm EN 60-335