



Characteristics


External dimensions : 900 x 800 x 770
 Construction in planetary brushed stainless steel 18.11
 Retort thickness 2mm
 Body structure 1mm, door 1mm, base 2mm
 Without base unit

Top

Power : 9,6 kW
 20 to 80 meals
 350°C security, by a ventilation fan
 Heating by heating elements
 5/6 levels GN1/1
 Double glazing glass door, right hinge
 Brightened stainless steel cooking chamber
 Rounded angles
 Delivered without internal equipment
 Production of steam by steam injection
 Temperature control of 270°C , steaming by regulator

Options :

stainless steel stand for r50-150 ac50-150 rege8-12 (X100101)
 storage rack gn1/1 (X100102)
 extra for changing elec current in 3x220v (X100702)
 5 shelves support spaced of 75 for r or ac50n (X102101)
 6 shelves level supports for r or ac50n (X102102)

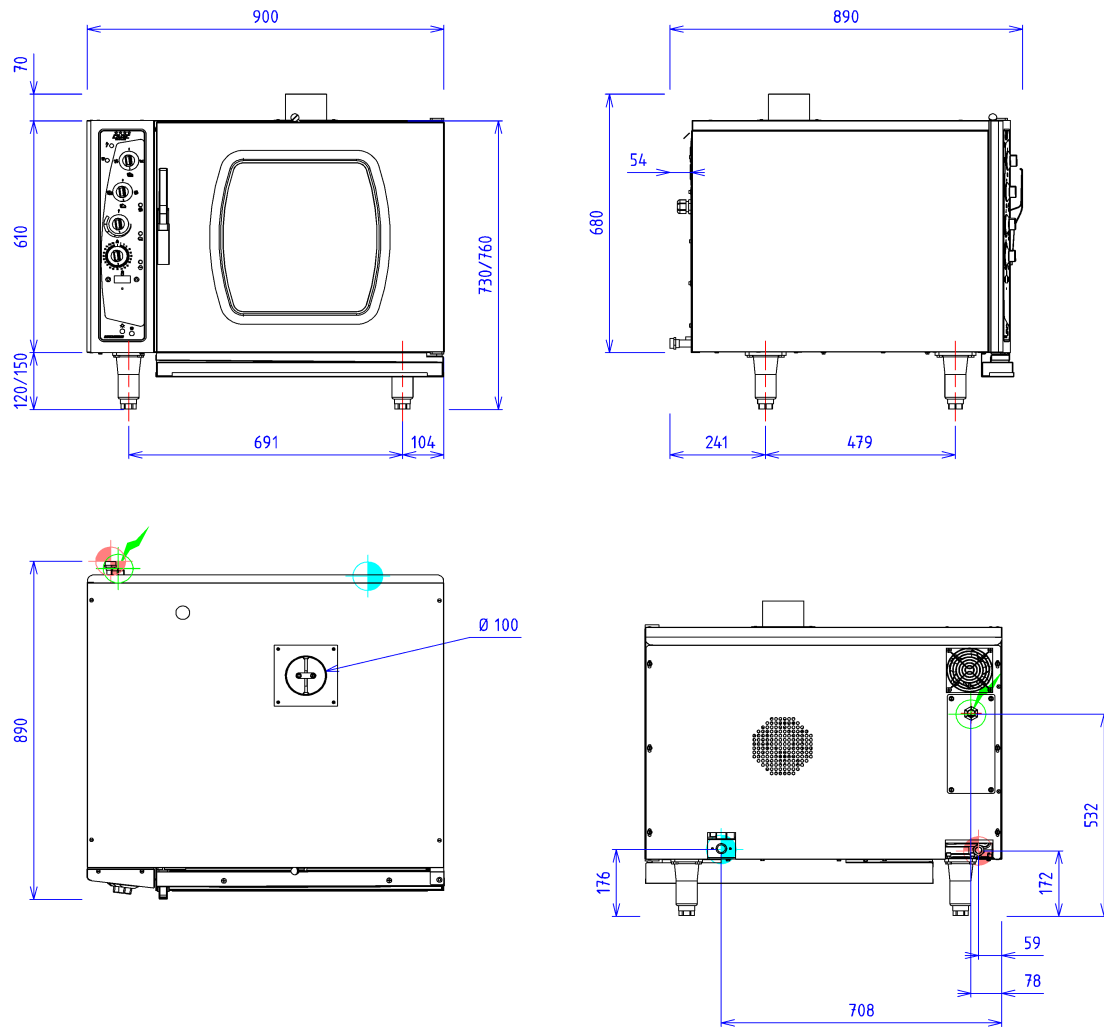

ELECTRIC



Electric power : 9.50kW

Elec Réserve : - Elec fitting : 400V THREE + NEUTRAL

Electrical devices standard to the norm EN 60-335