

EXPRESS OVEN RESTAURATION "EN" MODEL

OVEN ENTRY DIMENSIONS 500 X 80

**Characteristics**

External dimensions : 1290 X 945 X 610

Construction in planetary brushed stainless steel 18.11

Belt movement from left to right

Perforated top surface to hold plates & dishes at temperature

Note : do not suit to any food releasing fat products releasing fats

NOTE: A clearance of 250mm must be reserved on the back of the unit for ventilation

Top

Power : 9 kW

Retort 15/10 thick, covering 10/10

Heating by stainless steel resistances

Ventilation with turbine

Manufactured in stainless steel 18.10

Oven entry dimensions: 500 x 80 (lxh)

Temperature regulation up to 350 ° C

Digital card control and potentiometer

Adjustable belt feed speed from 40 sec. up to 6 min.


Options :

inlet and outlet tablets for catering express n (X360108)

mobile stand with shelf for express oven (X360202)

spray moisture for oven (X360301)

forward direction of the conveyor from right to left (X360410)

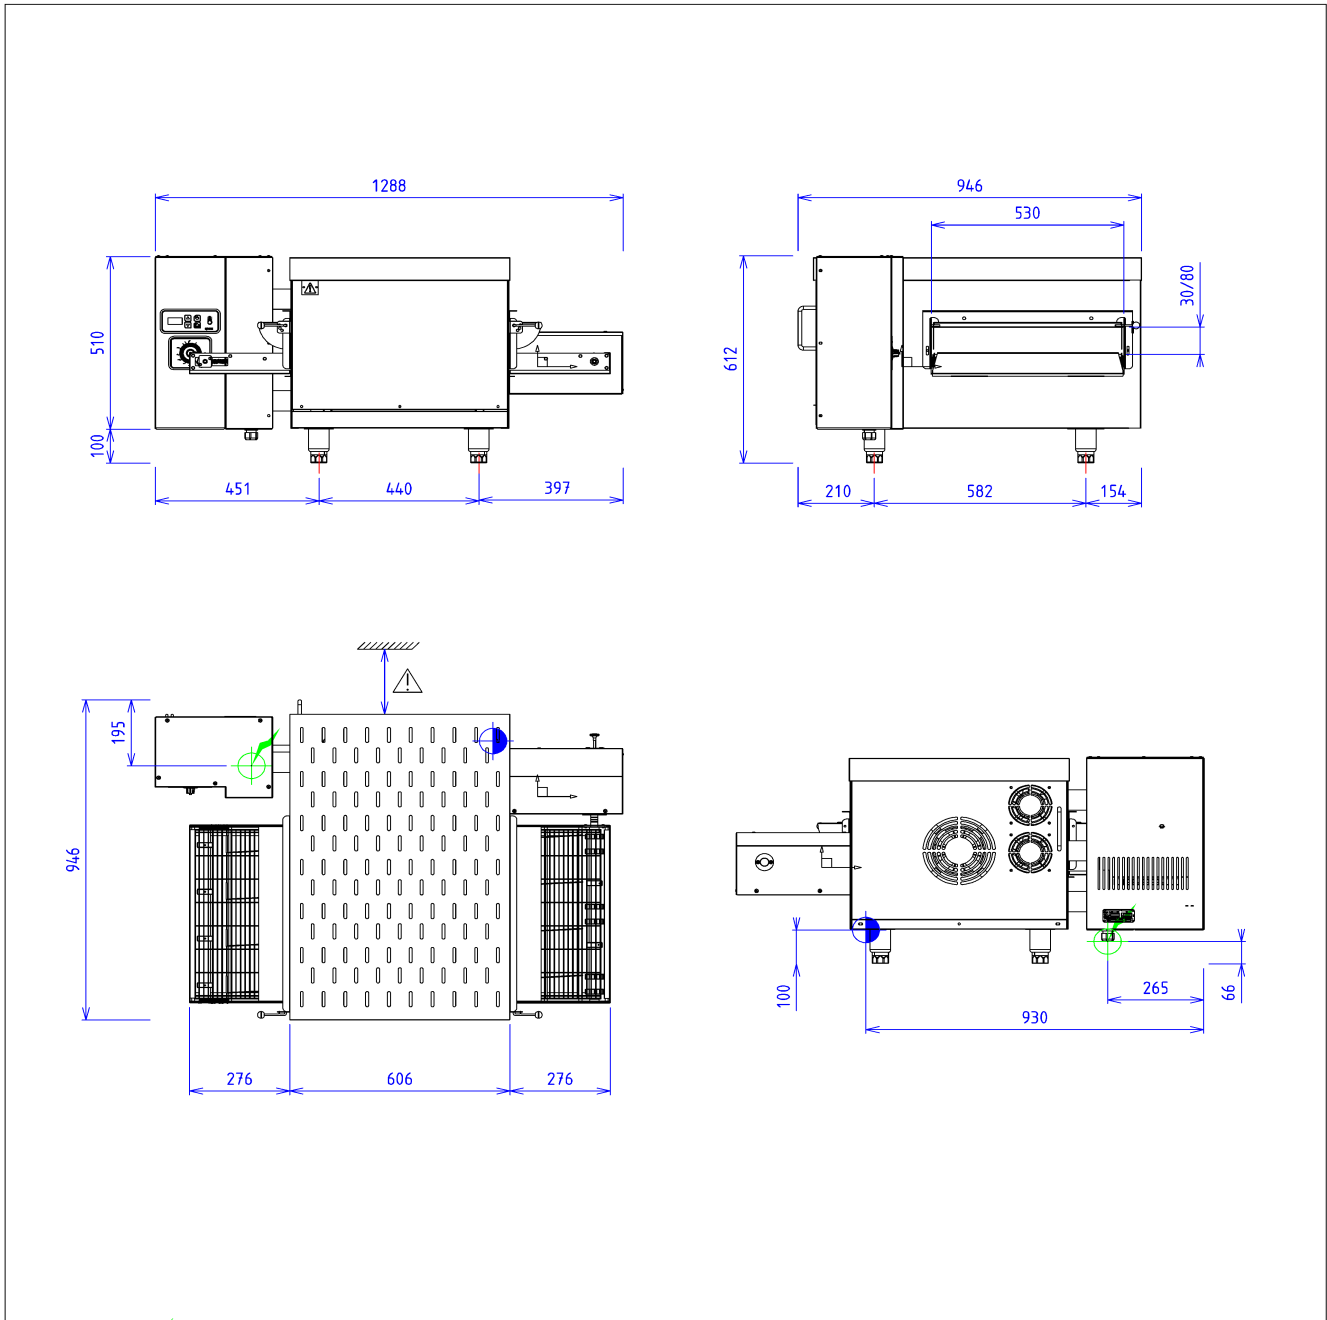

ELECTRIC



Electric power : 9.00kW

Elec Réserve : INTERNAL TERMINAL BOARD - Elec fitting : 400V THREE + NEUTRAL

230V SINGLE(Si option électrique sélectionnée)
Electrical devices standard to the norm EN 60-335

WATER/AIR



Cold water fitting :15/21 FLEXIBLE