



Characteristics

External dimensions : 1500 X 925 X 450
 Stainless steel top 18.10 planetary planetary brushed finish
 Top thickness : 3 mm
 body 1 mm in planetary brushed stainless steel
 Structure : 2 mm in stainless steel
 folded front edge radius 20 mm
 Back edge forming a chimney cover
 Front without any visible screw
 70mm space between kettle and pillars
 for an easy cleaning.

Descriptions


1 mm stainless steel double lid
 equipment with echtermann hinge
 Tank and double layer in stainless steel 18.10
 welded on the top
 2mm thickness for the ferrule and 3mm for the bottom
 Power: 25 kW
 Lid handle with insulated end
 Drain Valve 40/49 with retractable handle
 Heating by gas ramps
 Control by gas valve
 Net capacity : 225 l.
 Removable strainer with level indication
 Security pilot and thermocouple
 Hot/Cold water supply
 Volumetric watermeter
 Heating stop while tilting
 Electric ignition
 Digital sequential regulation
 End of cooking timer
 Dimensions (ØxP) : 750x570

Specification

Tilting by electric cylinders (IP66 without maintenance)
 Integration in the left pillar allowing complete
 protection from external aggressions
 Tilting control for a real
 ease of use, hygiene and safety
 Tilting stop in any position of tank

Options :

450 stainless steel feetheight 900/930 (X296001)
 handspray (X296021)
 regulation by sensor into the tank (X296031)
 support brackets for pilotethe pair (X299002)
 side edge straight open for assembly machineon the right side (X296041)
 side edge straight open for assembly machineon the left side (X296042)

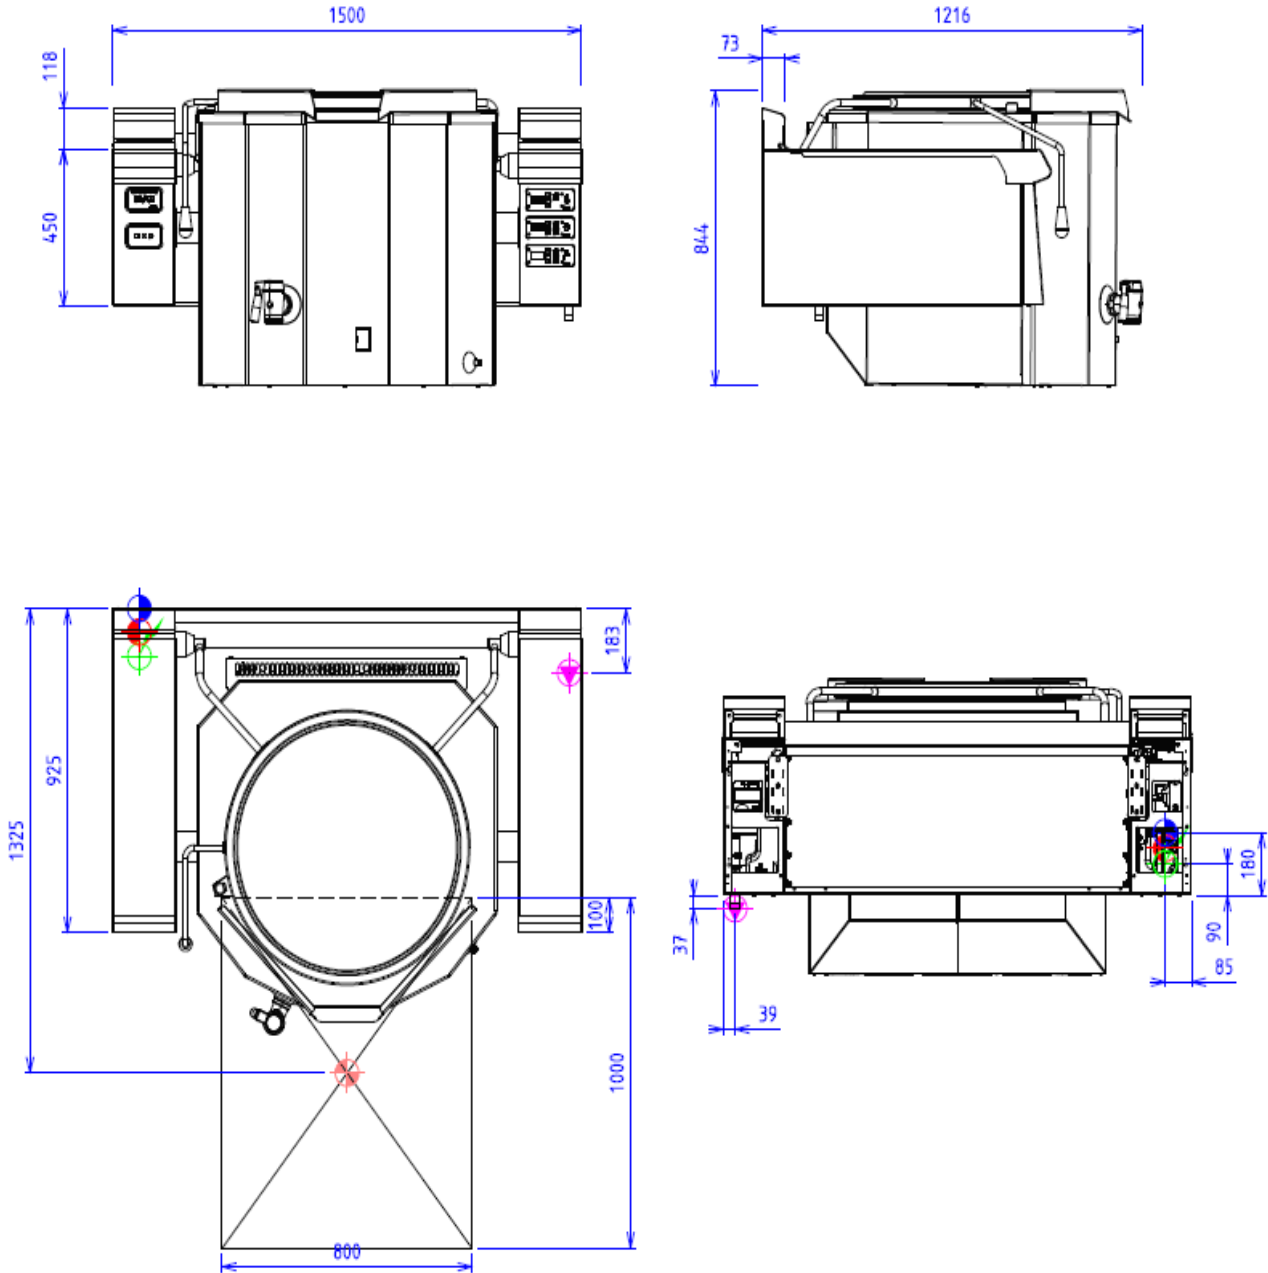

GAS



Gas power : 25kW

Gas connection : 20/27 MALE TAPERING

Gas appliances complying with standard NF EN 203.EN 437

Gas Directive 2009/142/EC

ELECTRIC



Electric power : 0.50kW

Elec Réserve : INTERNAL TERMINAL BOARD - Elec fitting : 230V SINGLE

Electrical devices standard to the norm EN 60-335

WATER/AIR



Hot water fitting :15/21 FLEXIBLE



Cold water fitting :15/21 FLEXIBLE