



Characteristics

External dimensions : 1300 X 925 X 670
 planetary brushed 18.10 stainless steel top
 Top thickness : 3 mm
 body 1 mm in planetary brushed stainless steel
 Structure : 2 mm in stainless steel
 folded front edge radius 20 mm
 Back edge forming a chimney cover
 Front without any visible screw
 70mm space between kettle and pillars
 for an easy cleaning.

Top

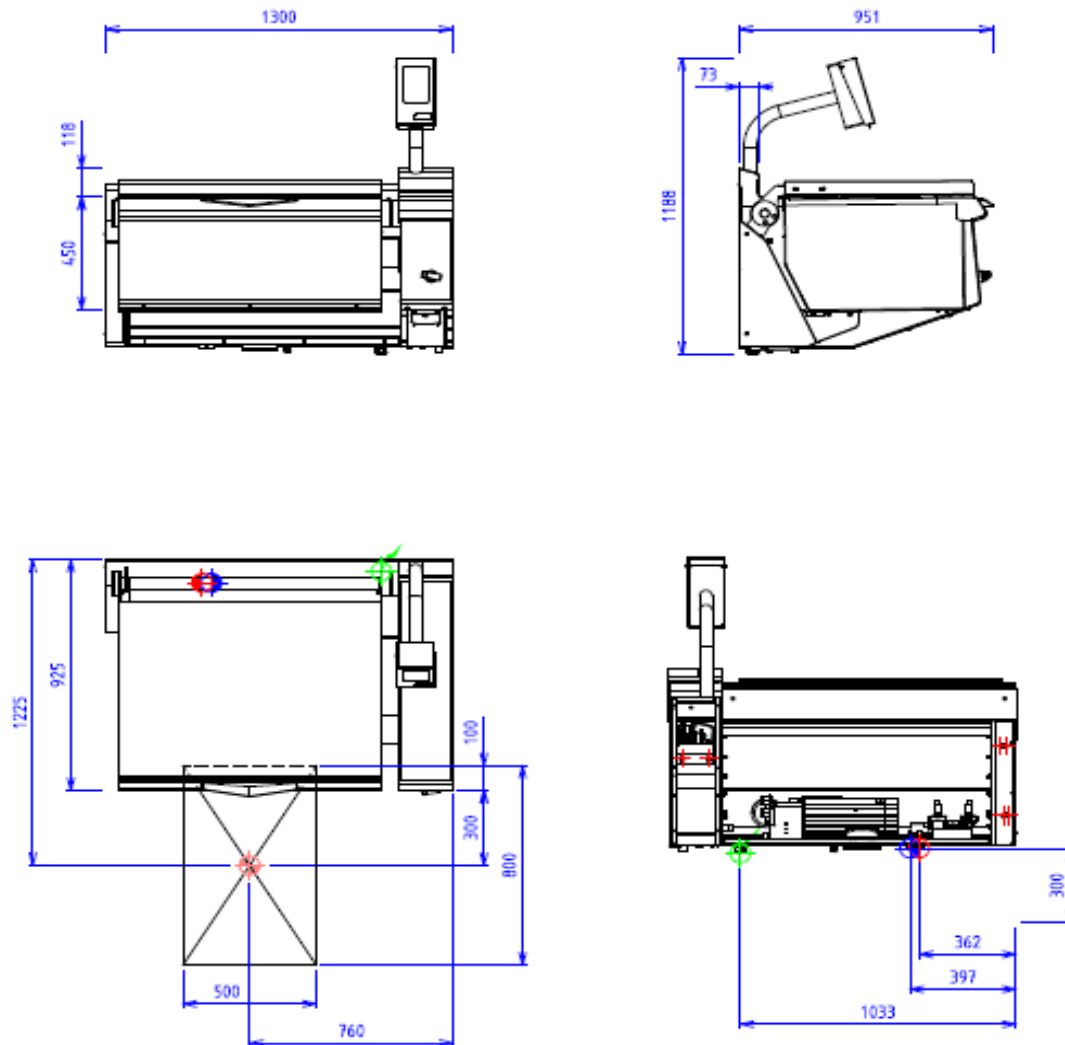
Doubled lid controlled by electric
 screw lifting jack (18.10 stainless steel)
 Tank in stainless steel 18.10 thickness 2 mm
 10mm thick duplex bottom
 Dimensions : 850x575x250
 Net capacity : 100 l.
 Power : 22.8 kW
 High efficiency specific resistance heating
 Hot/Cold water supply
 Water meter
 Heating stop while tilting
 Control by color touch screen
 recorded recipes
 Cooking mode selection
 Differred start and timer
 Choice between bottom tank probe or
 (Bratt pan or kettle cooking mode)
 Core probe
 Lift baskets attached to the lid (option)

Specification

Tilting by electric cylinders (IP66 without maintenance)
 Tilting control for a real
 ease of use, hygiene and safety
 Tilting stop in any position of tank
 Integration in the right pillar allowing complete

Options :

removable holding frame for gn1/1 trays 2 trays (X295008)
 4 height adjustable feet (per equipment) (X296050)
 gn1/1 perforated basket depth 200 with support arch for electric lifting (X296051)
 rs output for traceability (X238009)
 spout trainer (X295009)

**ELECTRIC**

Electric power : 22.80kW

Elec Réservation : INTERNAL TERMINAL BOARD - Elec fitting
: 400V THREE + NEUTRAL

Electrical devices standard to the norm EN 60-335

WATER/AIR

Hot water fitting :15/21 FLEXIBLE



Cold water fitting :15/21 FLEXIBLE