




The reference in catering equipment

BRATT PAN KETTLE WITH MIXING ARM 44 dm² TYPE RC GAS ELEC TILTING - HW/CW SUPPLY

CENTRAL KITCHENS FRONT 1500

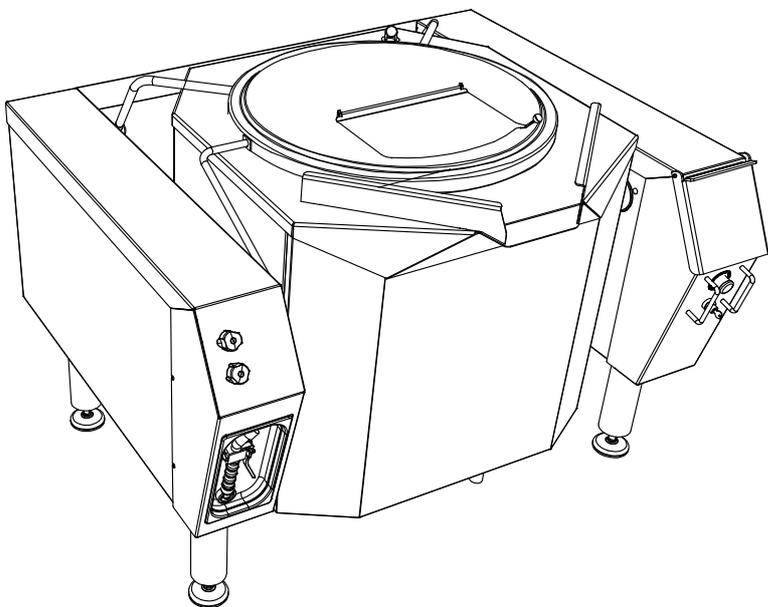

Characteristics :

External dimensions : 1500x1200x950/1000
18.10 stainless steel
Brushed appearance
Top thickness 2 mm
Structure 2 mm in stainless steel
Back edge
Front without any visible screw
70mm space between tank and pillars
for an easy cleaning.
Full drain at 400mm off the ground

Descriptions :

Counterbalanced and doubled lid with a food trap
(18.10 stainless steel)
316L stainless steel tank
Bottom of tank thickness 12mm
Wide spout
Tank dimensions : Ø750x400
Work surface : 44 dm²
Capacity up to 160 l.
Power: 28 kW
Heating by gas ramps
Hot/Cold water supply
Water meter
Drop-in by electric screw lifting jack
Heating stop while tilting
Control by color touch screen
Manually operating mode or from
recorded recipes
Thermostatic regulation (Bottom of tank)
Differed start and timer
Removable mixing arm with stainless steel scrapers
Programmable cycle, speed and direction of rotation

Specifications :


Tilting by electric cylinders
Protection class IP66, no maintenance
Integration in the pillars allowing complete
protection from external aggressions
Tilting controller allows reliability,
ease of use, hygiene and safety
stop at any tank

Options :

Water jet with extendable hose (X238006)
Draining valve 40/49 on front panel (X238007)
RS output for traceability (X238009)
Stand for tilting system at 700mm off the ground (X238010)
Draining rack (8Ø standard perforation) (X238011)

CENTRAL KITCHENS

BRATT PAN KETTLE WITH MIXING ARM 44 dm² TYPE RC GAS ELEC TILTING - HW/CW SUPPLY

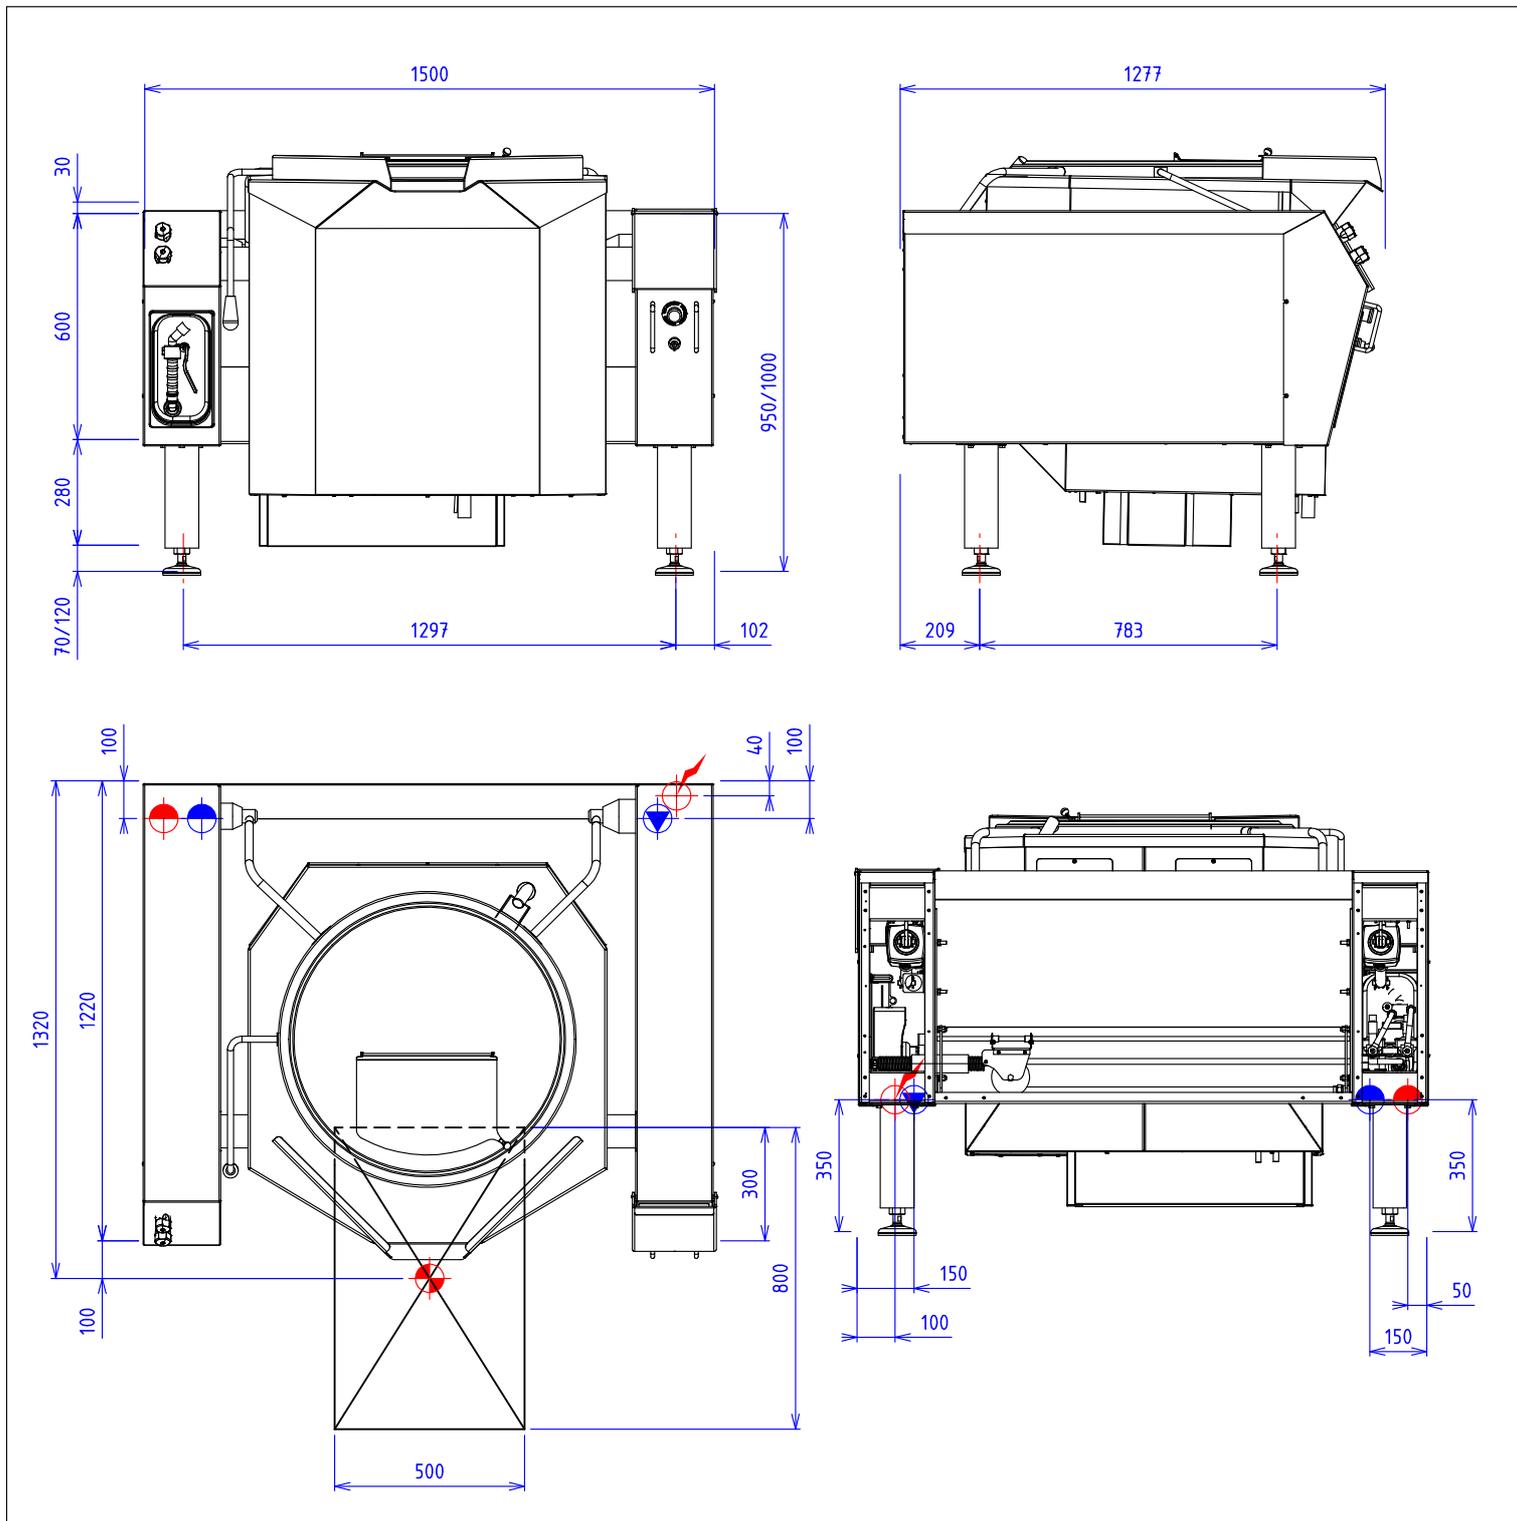

GAS :  Gas power : 28kW conical 20/27 gas fitting

ELEC :  Electric power : 2 kW Elec reservation : internal wiring Elec fitting : 230V Mono+T

WATER :  Hot water fitting: 15/21 socket
 Cold water fitting: 15/21 socket

Gas devices standard to the norm NF EN 203. EN 437 / Gas Law 90/396/CEE

Electrical devices standard to the norm EN 60-335