



Characteristics

External dimensions : 1800 X 1200 X 900
 Front without any visible screw
 70mm space between kettle and pillars
 for an easy cleaning.
 Full drain at 400mm off the ground
 18.10 stainless steel
 Folded top edges - 2mm thickness
 Planetary finish
 2 mm thickness structure
 Pre-equipped for energy optimizer

Descriptions


316L stainless steel tank
 Wide spout
 Power: 24 kW
 Heating by heating elements
 Hot/Cold water supply
 Water meter
 Heating stop while tilting
 Manually operating mode or from
 recorded recipes
 Differed start and timer
 Programmable cycle, speed and direction of rotation
 Control by color touch screen
 Counterbalanced and doubled lid with a food trap
 with ingredient trapdoor
 Tank dimensions : Ø900x510
 Bottom of tank thickness 12mm
 Thermostatic regulation (Bottom of tank)
 Removable mixing arm with stainless steel scrapers
 Work surface : 64 dm²
 Capacity up to 300 l.

Specification

Tilting by electric cylinders (IP66 without maintenance)
 Integration in the pillars allowing complete
 protection from external aggressions
 Tilting control for a real
 ease of use, hygiene and safety
 Tilting stop in any position of tank

Options :

water jet with extendable hose (X238006)
 draining valve 40/49 on the front panel of the kettle (X238007)
 pre-equipement optim. energiepour marmites basculantes (X238008)
 rs output for traceability (X238009)
 draining rack (X238011)
 4 weels of stainless steel2 with breaks for upc range (X230405)
 stand for tilting systemat 700 mm of the ground (X238010)

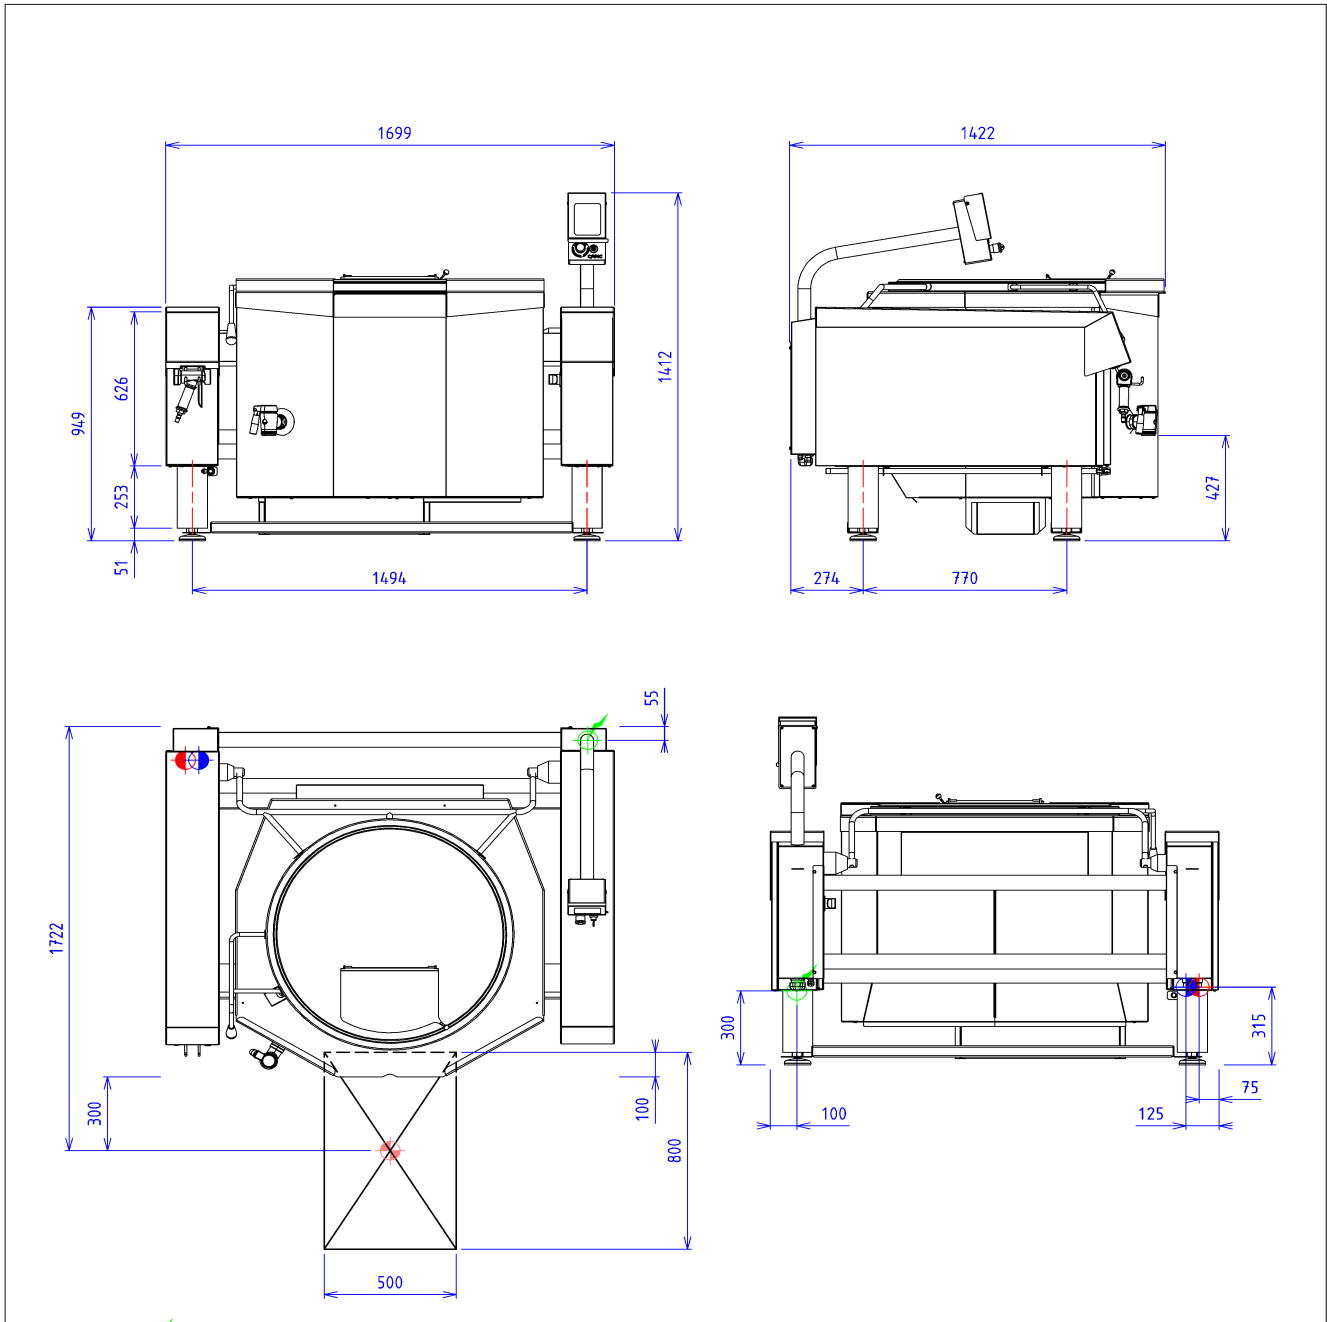

ELECTRIC



Electric power : 24.00kW

Elec Réserve : INTERNAL TERMINAL BOARD - Elec fitting : 400V THREE

Electrical devices standard to the norm EN 60-335

WATER/AIR



Hot water fitting :15/21 FLEXIBLE



Cold water fitting :15/21 FLEXIBLE