




The reference in catering equipment

CHOMATIC
LOADING LEFT HAND

UPC RANGE FRONT 1200

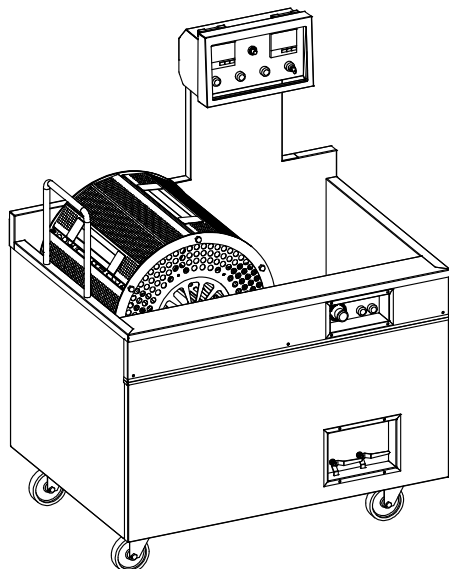

Characteristics :

Overall dimensions: 1200 x 880 x 1600

In stainless steel 18/10

Top with flanging edges 30/10

Specifications :

Tank rotation with geared motor

Protection rate IP66

Integration warranting a full protection
against external aggressions

Description :

Reheating frozen products under vacuum

Drum with 6 compartments

Adjustable process time from 3 to 20 min

Reheating tank 149 liters

Keeping temperature tank 52 liters

Tank in stainless steel 316L

Bottom of tank 30/10

Regulation of Temperatures in tank

Heating power 14 KW

Heating with armored electrical heaters

Automatic control of water levels in tank

Control set on front


Overflow led to floor on front of the equipment

Stainless steel valve 20/27



Options :

Support frame for GN1/1 tray

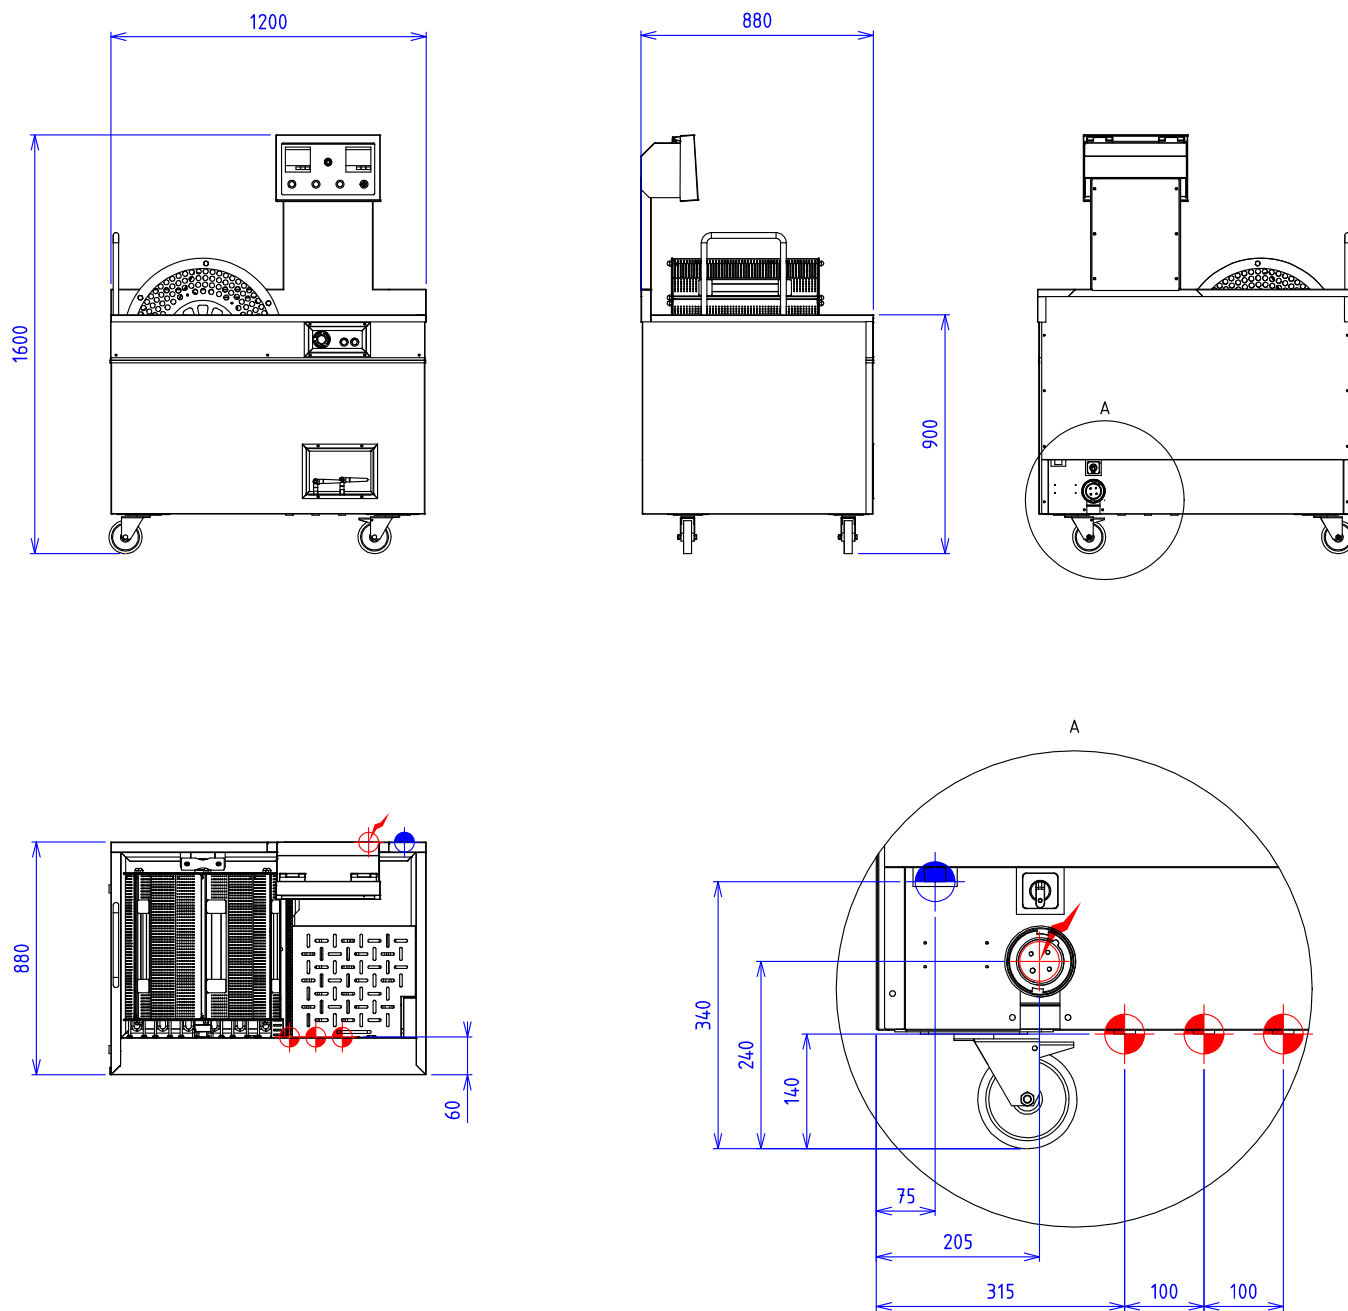CHOMATIC LOADING LEFT HAND



ELEC :  Electric Power : 14 kW Electrical Connections : 400V x 3 + Ground Frequency : 50Hz

WATER :  Water connection : 20/27, 3 bars max
 Drainage : 2 Valves 20/27 - 1 Overflow 20/27

Electrical devices standard to the norm EN 60-335

The emblems, descriptions and diagrams of this documentation are given for your information and could be modified without notice.



69, av. des sports- 29556 QUIMPER CEDEX9-FRANCE
 tel.: 02.98.64.77.00 - fax: 02.98.52.06.47 e-mail : capic@capic-fr.com