




The reference in catering equipment

CHOMATIC  
LOADING RIGHT HAND

## UPC RANGE FRONT 1200

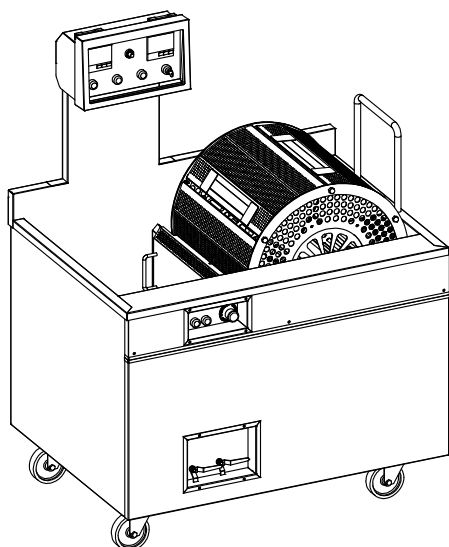

### **Characteristics :**

Overall dimensions: 1200 x 880 x 1600

In stainless steel 18/10

Top with flanging edges 30/10

### **Specifications :**

Tank rotation with geared motor

Protection rate IP66

Integration warranting a full protection  
against external aggressions

### **Description :**

Reheating frozen products under vacuum

Drum with 6 compartments

Adjustable process time from 3 to 20 min

Reheating tank 149 liters

Keeping temperature tank 52 liters

Tank in stainless steel 316L

Bottom of tank 30/10

Regulation of Temperatures in tank

Heating power 14 KW

Heating with armored electrical heaters

Automatic control of water levels in tank

Control set on front


Overflow led to floor on front of the equipment

Stainless steel valve 20/27



### **Options :**

Support frame for GN1/1 tray
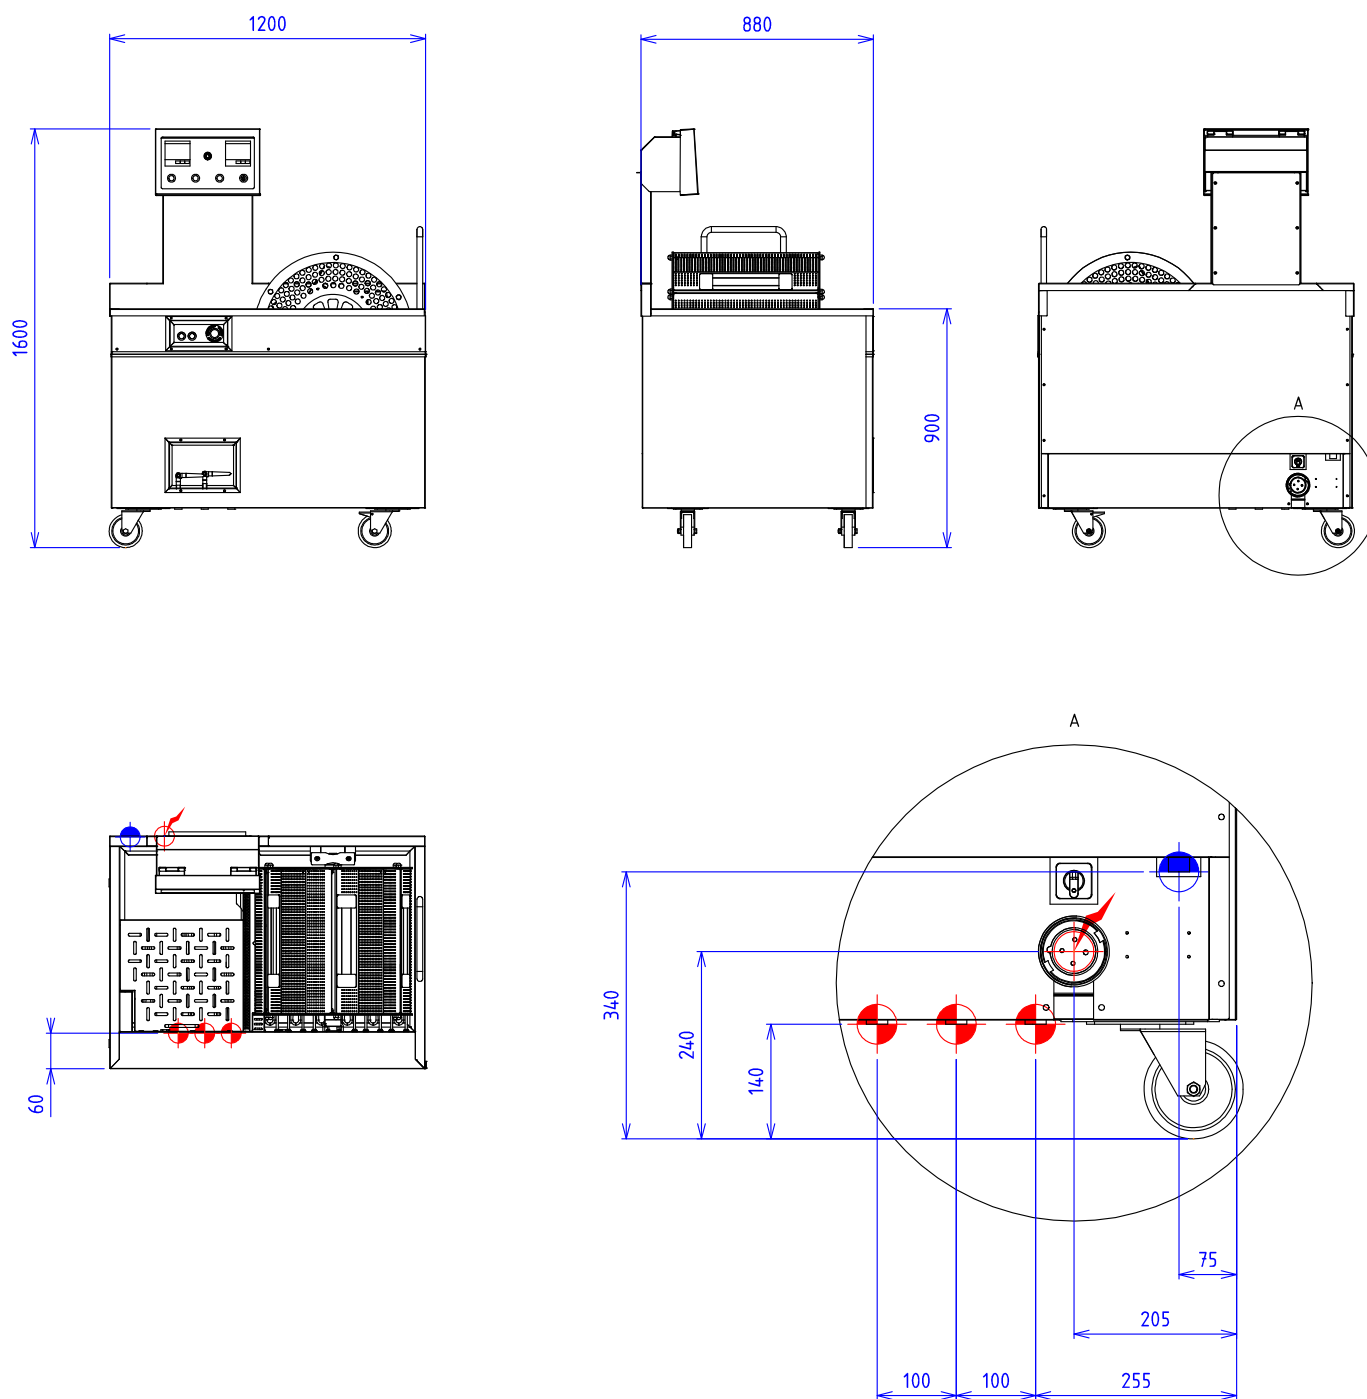
## CHOMATIC LOADING RIGHT HAND



**ELEC :**  Electric Power : 14 kW    Electrical Connections : 400V x 3 + Ground    Frequency : 50Hz

**WATER :**  Water connection : 20/27, 3 bars max  
 Drainage : 2 Valves 20/27 - 1 Overflow 20/27

Electrical devices standard to the norm EN 60-335

The emblems, descriptions and diagrams of this documentation are given for your information and could be modified without notice.



69, av. des sports- 29556 QUIMPER CEDEX9-FRANCE  
 tel.: 02.98.64.77.00 - fax: 02.98.52.06.47 e-mail : capic@capic-fr.com