


## **CELTIC 800**

### **FRONT 500**

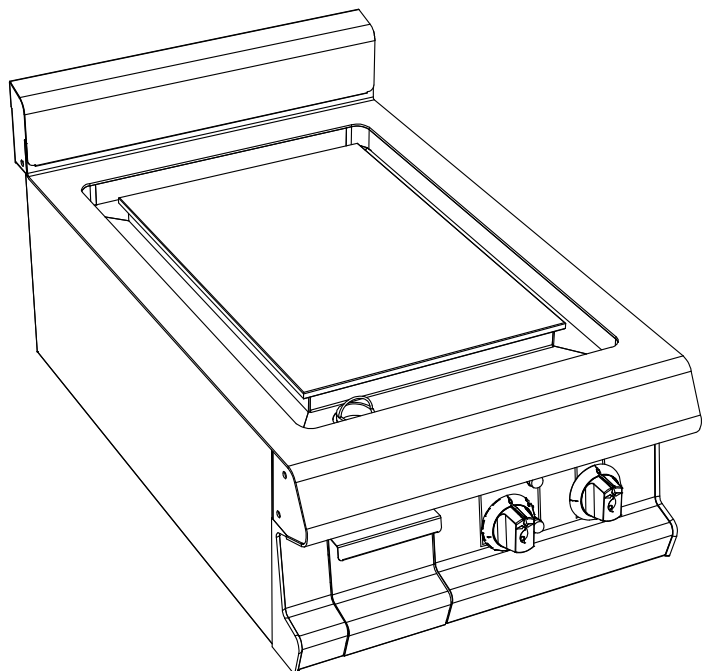

#### **Characteristics :**

External dimensions : 500x836x270

Top in brushed 18.10 stainless steel

Top thickness : 3 mm

body 1 mm in brushed stainless steel

Structure : 2 mm in stainless steel

folded front edge radius 20 mm

Back edge forming a chimney cover

Front without any visible screw

#### **Top :**

Special stainless steel plate 18.10 thickness 15 mm

Dimensions : 340x515

Power : 3 kW

Heating by reinforced stainless steel resistance

Leaned against the bottom of the plate

1 heating zone controlled by independent thermostat

Scraper included

peripheral water trough for easy cleaning

over-flow and draining stopper

cleaning and wasted water tray

#### **Options :**

Polishing chrome aspect (X050974)

Ribbed 1/2 (X050975)

Ribbed complet (X050976)





Removable splash guard (X900631)

Water feeding controlled from front, waste filter

External draining to be fit (X051521)

Stainless steel trim bar (X081001)

## C15S S/S STEEL PLANCHA ELEC. TOP ONLY

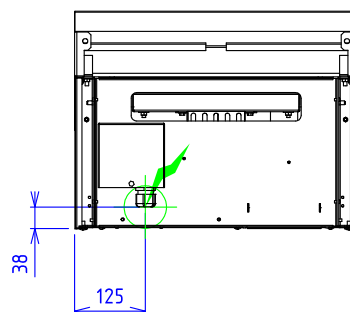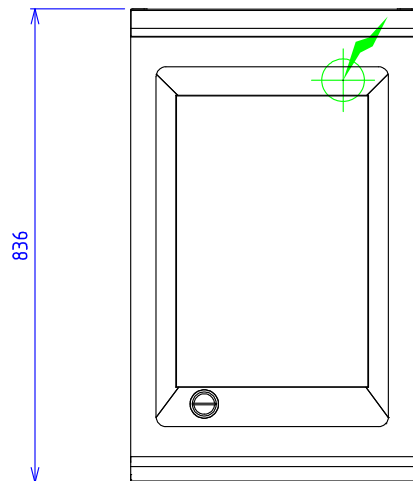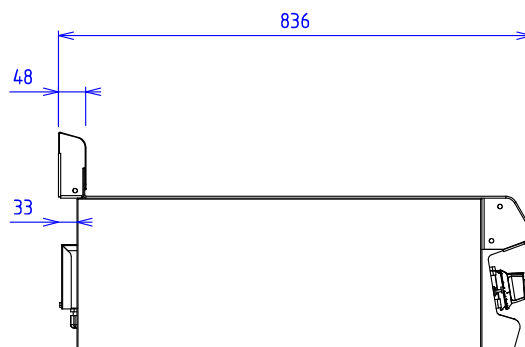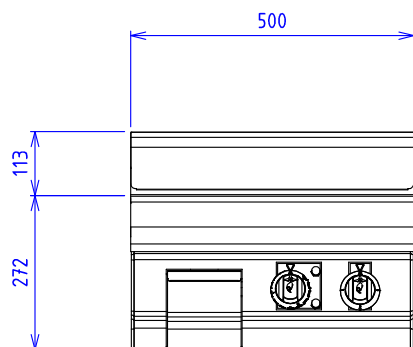

**ELEC :**  Electric power : 3 kW Elec reservation : internal wiring Elec fitting : 400Vx3+T

Electrical devices standard to the norm EN 60-335

The emblems, descriptions and diagrams of this documentation are given for your information and could be modified without notice.