


**C29I STAINLESS STEEL SMOOTH AND HORIZONTAL PLATE  
 ELEC OVEN**

**CELTIC 800  
 FRONT 800**

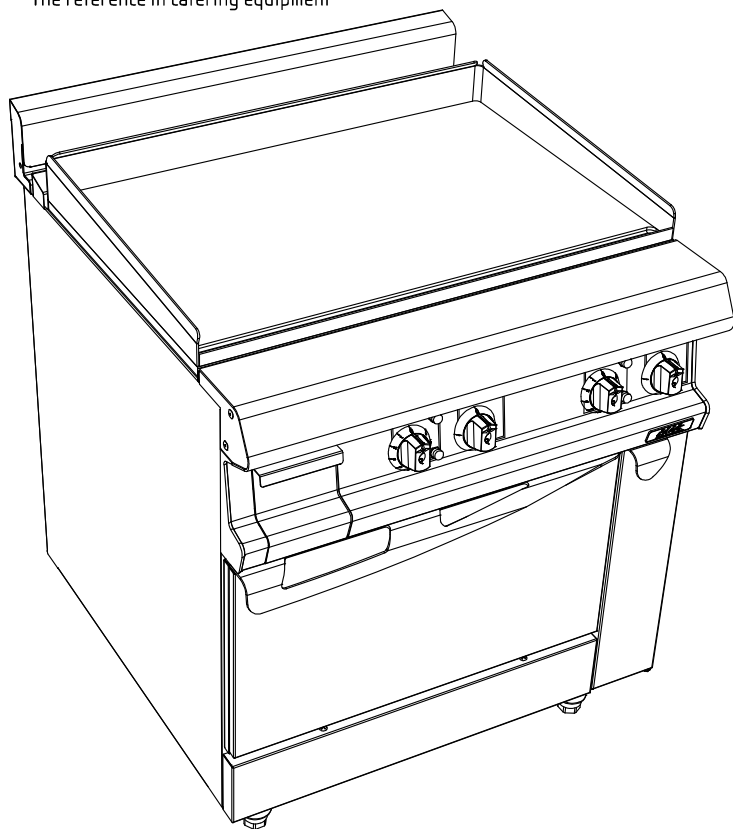

**Characteristics :**

External dimensions : 800x836x900/930  
 Top in brushed 18.10 stainless steel  
 Top thickness : 3 mm  
 body 1 mm in brushed stainless steel  
 Structure : 2 mm in stainless steel  
 composite feet de 150 height adjustable  
 folded front edge radius 20 mm  
 Back edge forming a chimney cover  
 Front without any visible screw

**Top :**

Stainless steel smooth plate 800x550 - 15mm thickness  
 Heating by reinforced stainless steel heating elements.  
 2 independent thermostat zones of heating.  
 Power : 10 kW  
 Welded upstand - height: 80mm - thicknes: 3mm  
 Drawer to collect greases.  
 Scraper included.


**Base unit :**


Construction in stainless steel 18.10  
 Structure 2 mm  
 body 1 mm  
 External dimensions : 800x724x650  
 Front without any visible screw  
 Dimension of the retort : 650x530x280  
 Walls insulated by mineral fibers  
 aluminium steam barrier  
 Power 5.1kW thermostat 50 à 300°C  
 Commutateur et Lighting indicator  
 Reinforced stainless steel resistances located  
 all around top and bottom  
 heating together or separatly  
 Removable steel bottom 6 mm thickness  
 stainless steel lateral walls  
 with levels holding griddles  
 Door to double wall insulated and balanced  
 Provided with one stainless steel griddle GN2/1

**Options :**

Stainless steel trim bar (X081001)

## C29I STAINLESS STEEL SMOOTH AND HORIZONTAL PLATE ELEC OVEN

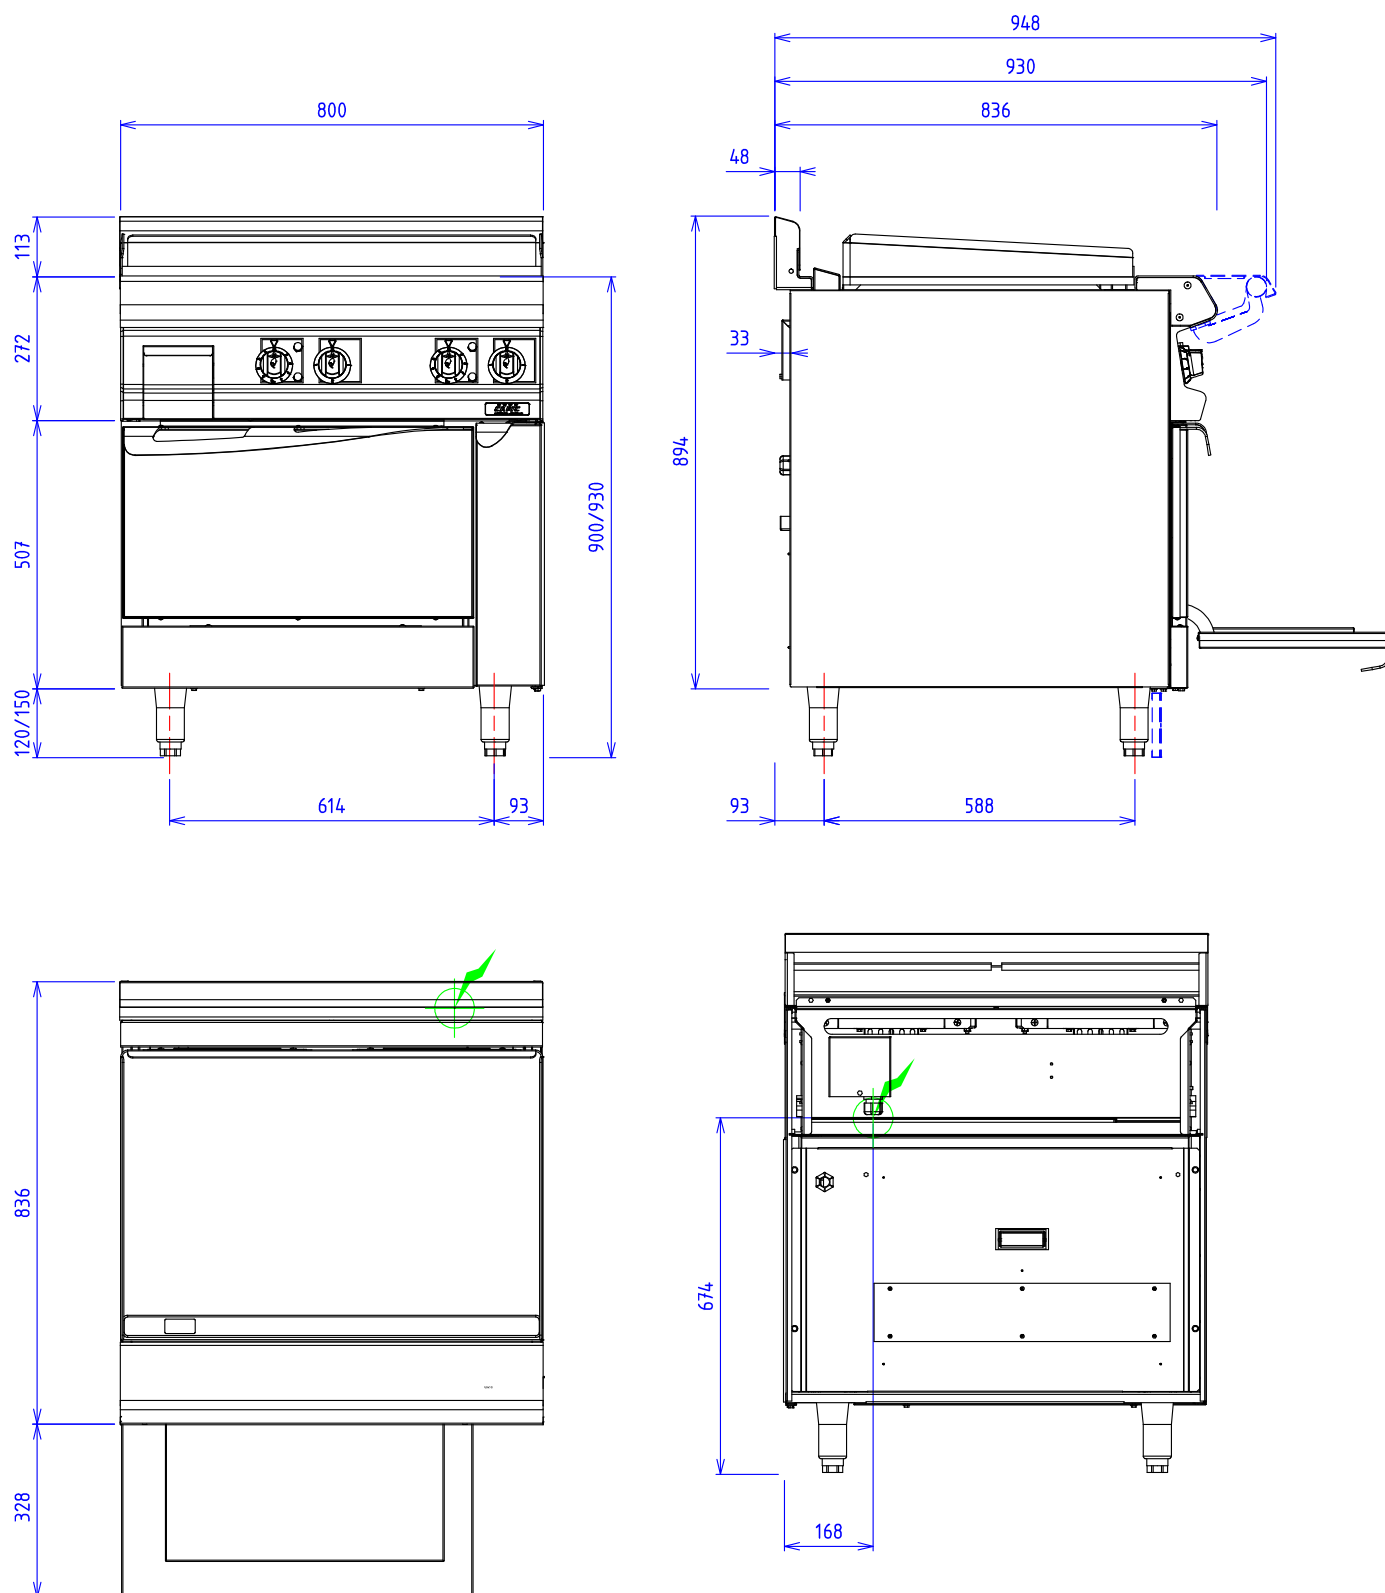

**ELEC :**  Electric power : 15.1 kW Elec reservation : internal wiring Elec fitting : 400Vx3+T

Electrical devices standard to the norm EN 60-335

The emblems, descriptions and diagrams of this documentation are given for your information and could be modified without notice.