


**C29I STAINLESS STEEL SMOOTH AND HORIZONTAL PLATE
 GAS OVEN**

**CELTIC 800
 FRONT 800**

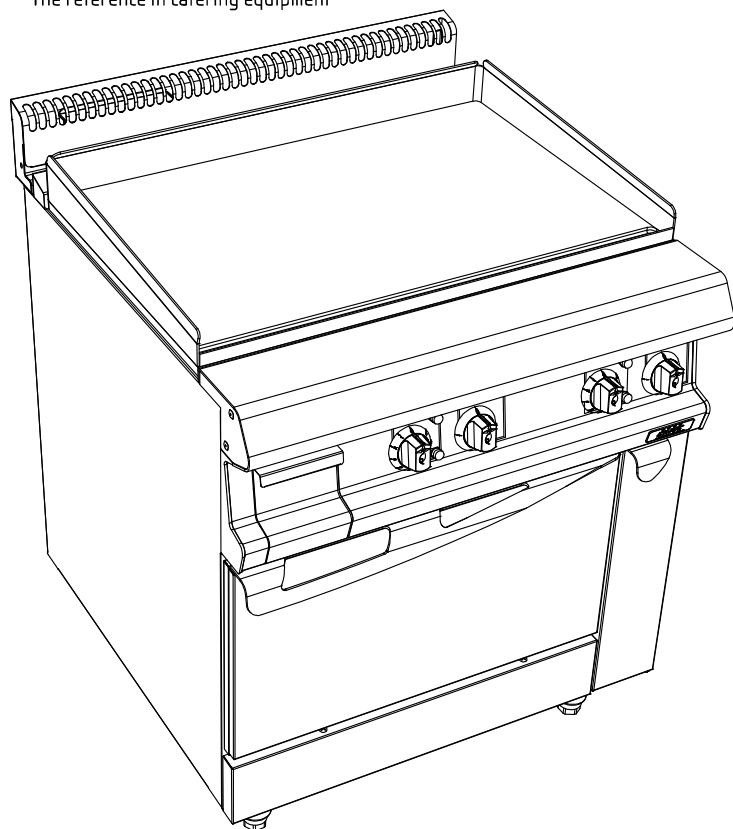

Characteristics :

External dimensions : 800x836x900/930
 Top in brushed 18.10 stainless steel
 Top thickness : 3 mm
 body 1 mm in brushed stainless steel
 Structure : 2 mm in stainless steel
 composite feet de 150 height adjustable
 folded front edge radius 20 mm
 Back edge forming a chimney cover
 Front without any visible screw

Top :

Stainless steel smooth plate 800x550 - 15mm thickness
 Heating by reinforced stainless steel heating elements.
 2 independent thermostat zones of heating.
 Power : 10 kW
 Welded upstand - height: 80mm - thicknes: 3mm
 Drawer to collect greases.
 Scraper included.


Base unit :

Construction in stainless steel 18.10
 Structure 2 mm
 body 1 mm
 External dimensions : 800x724x650
 Front without any visible screw
 Dimension of the retort : 650x530x280
 Walls insulated by mineral fibers
 aluminium steam barrier
 Power 10 kW thermostat 50 à 300°C
 Removable steel bottom 6 mm thickness
 Security pilot and thermocouple
 stainless steel lateral walls
 with levels holding griddles
 Door to double wall insulated and balanced
 Provided with one stainless steel griddle GN2/1


Options :

Electric ignition (X901501)
 Stainless steel trim bar (X081001)

C29I STAINLESS STEEL SMOOTH AND HORIZONTAL PLATE GAS OVEN

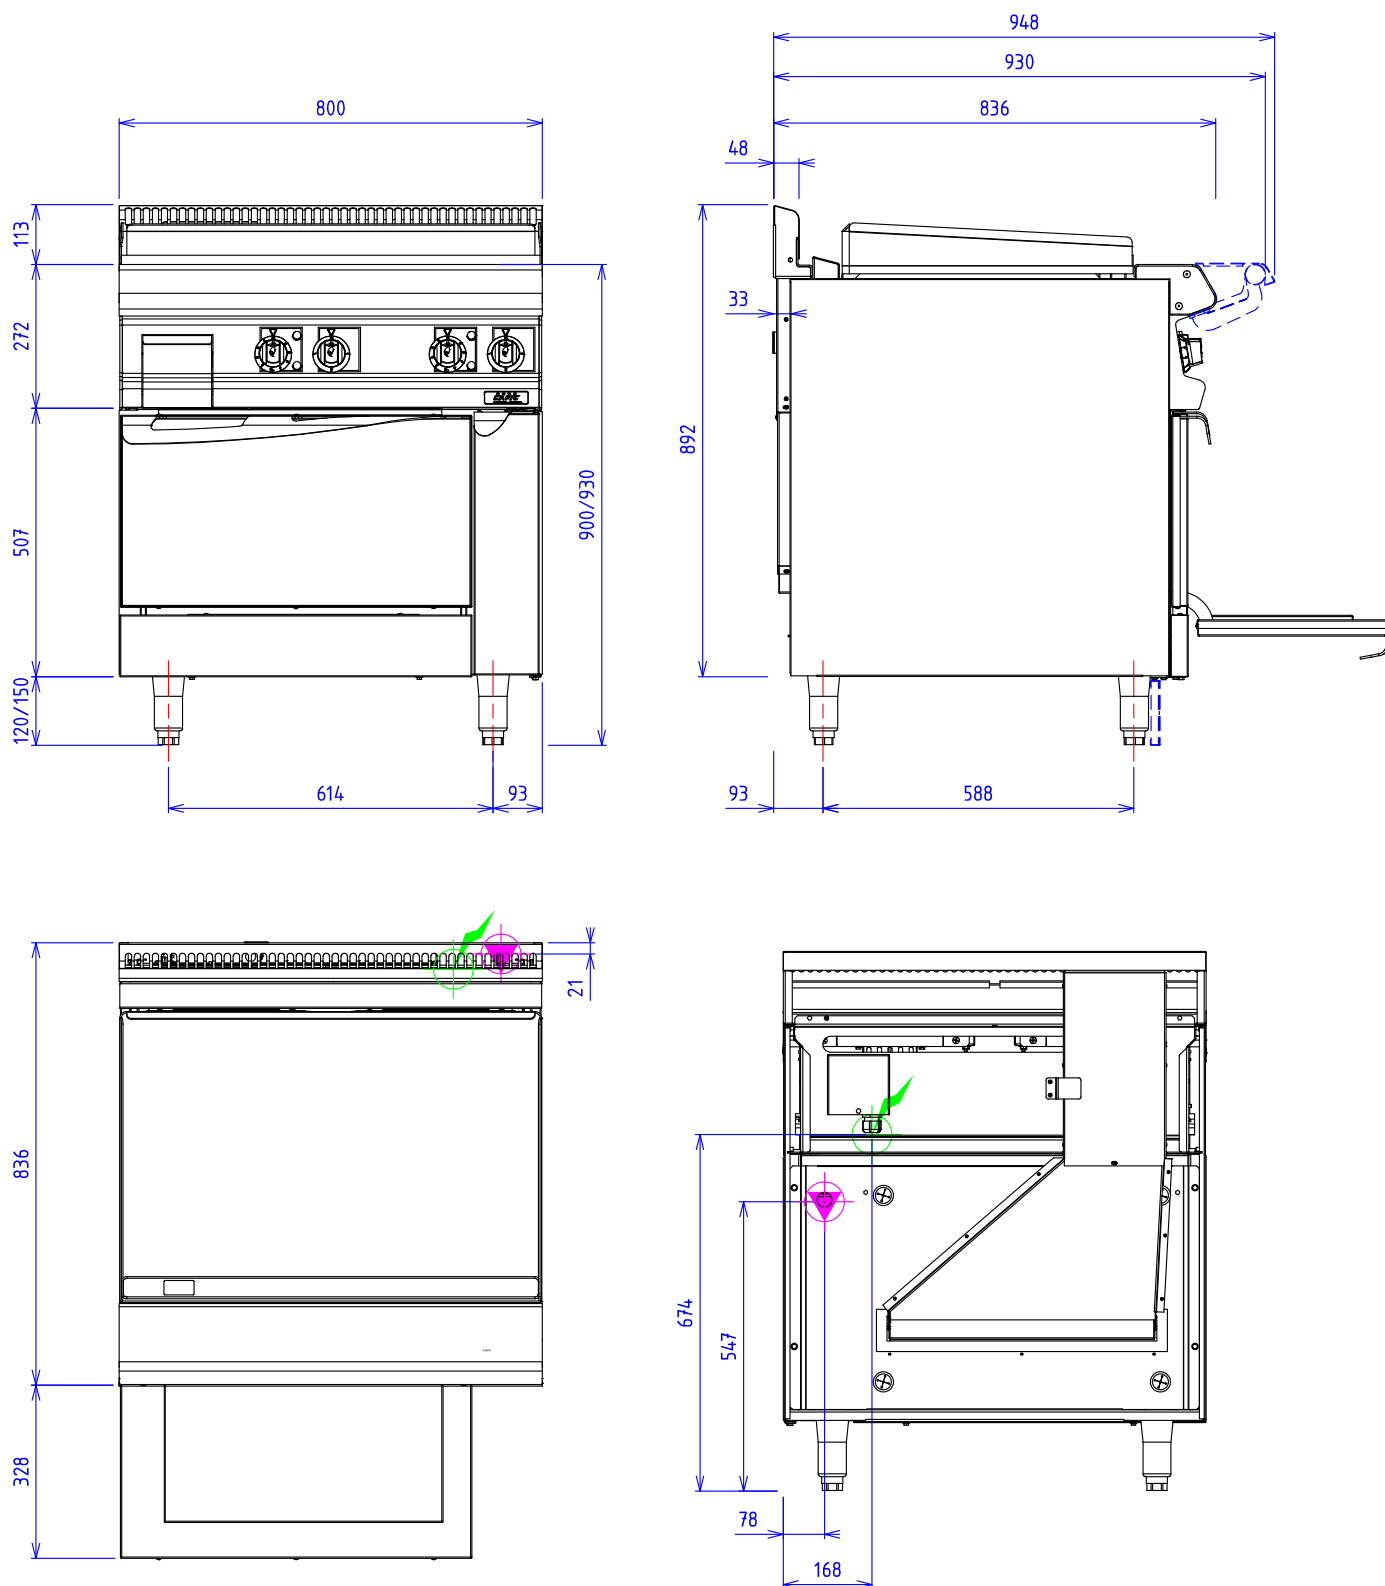

GAS :  Gas power : 10kW conical 15/21 gas fitting

ELEC :  Electric power : 10 kW Elec reservation : internal wiring Elec fitting : 400Vx3+T

Gas devices standard to the norm NF EN 203. EN 437 / Gas Law 2009/142/CE

Electrical devices standard to the norm EN 60-335