

Characteristics

External dimensions : 800 X 836 X 270
 Stainless steel top 18.10 planetary planetary brushed finish
 Top thickness : 3 mm
 body 1 mm in planetary brushed stainless steel
 Structure : 2 mm in stainless steel
 Stand with composite feet of 150 adjustable in height
 folded front edge radius 20 mm
 Back edge forming a chimney cover
 Front without any visible screw

Top


4 open burners
 Remotely controlled flame burners from: 4x7kW
 BURNERS WITH STAINLESS STEEL HOUSING
 Burner griddles in stainless steel, dimensions : 400x600
 Stamped tank & cleaning tray
 Security by thermocouple with pilotlight
 secured and protected commands

Options :

electric ignition gas burner(first gas burner) (X901501)
 electric ignition gas burnereach other gas burner (X901502)

Base unit

Construction in stainless steel 18.10
 Structure 2 mm
 body 1 mm
 External dimensions : 800x724x650
 Interior dimensions : 600x656x380
 Front without any visible screw
 2 SWINGING DOORS double skin
 intermediate shelf
 Power 1,5 kW
 Regulation by thermostat 0-85°C

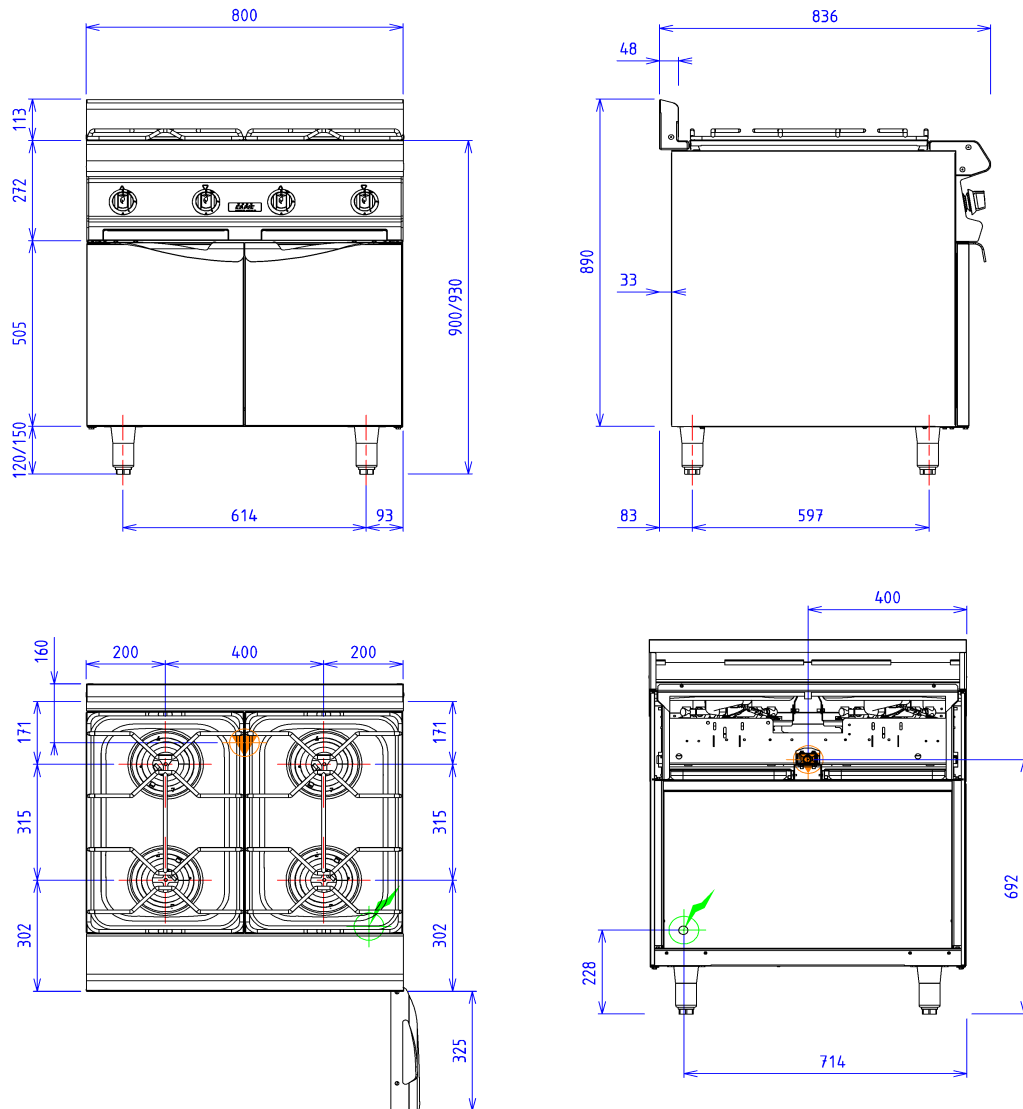

GAS



Gas power : 28kW

Gas connection : 20/27 MALE TAPERING

Gas appliances complying with standard NF EN 203.EN 437

Gas Directive 2009/142/EC

ELECTRIC



Electric power : 1.50kW

Elec Réserve : - Elec fitting :

230V SINGLE(Si option électrique sélectionnée)

Electrical devices standard to the norm EN 60-335