



CATERING RANGE ABM9I SMOOTH STAINLESS STEEL GRIDDLE GAS CLOSED CUPBOARD



Characteristics

External dimensions : 400 X 1000 X 900
 Stainless steel top 18.10 planetary planetary brushed finish
 Top thickness : 3 mm
 body 1 mm in planetary brushed stainless steel
 Structure : 2 mm in stainless steel
 Stand with composite feet of 150 adjustable in height
 folded front edge radius 20 mm
 Back edge forming a chimney cover
 Front without any visible screw

Top

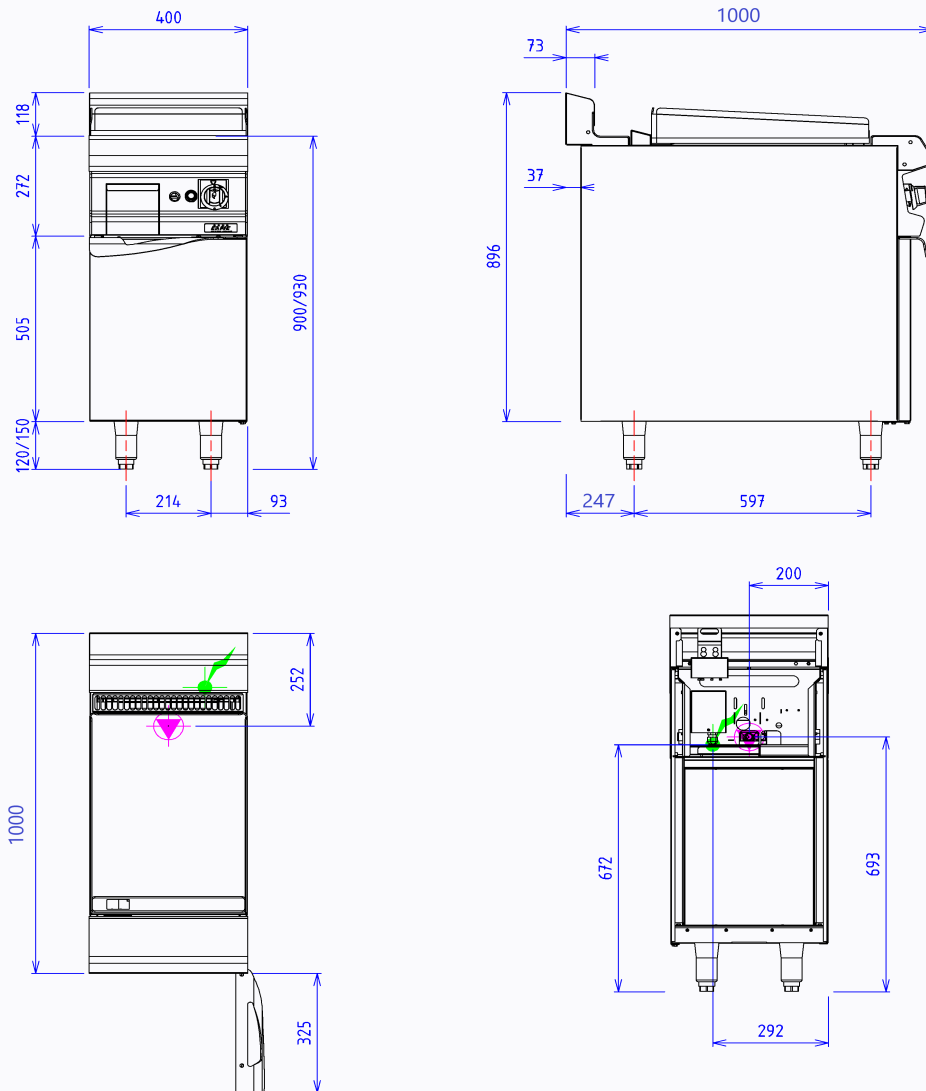
special stainless steel plate : 400x550
 Power : 7,2 kW
 regulated flow by a 3-positions tap
 Heating by gas stainless steel ramps with great thickness
 Security pilot and thermocouple
 Welded Splash gard
 Drawer to collect greases

Options :

1/2 ribbed griddle 400x500 stainless steel 400 or 500 (X050972)
 ribbed griddle for stainless steel plate 400 (X050973)
 mirror polishing chrome aspect (X050974)
 gas connection kit for hose per device (X901405)
 electric ignition gas burner (first gas burner) (X901501)

Base unit

Construction in stainless steel 18.10
 Structure 2 mm
 body 1 mm
 External dimensions : 400x724x650
 Interior dimensions : 330x656x430
 Front without any visible screw
 Double skin doors

**GAS**

Gas power : 7.20kW

Gas connection : 15/21 MALE TAPERING

Gas appliances complying with standard NF EN 203.EN 437

Gas Directive 2009/142/EC

ELECTRIC

Electric power : 0.00kW

Elec Réserve : - Elec fitting :

230V SINGLE(Si option électrique sélectionnée)

Electrical devices standard to the norm EN 60-335