



Characteristics

External dimensions :800 X 1400 X 1080

stainless steel construction, body 1mm thick

Heating by reinforced stainless steel resistances

Top

2 stainless steel levels shelves perforated of

Simple glazing glass door, right hinge

Regulation by electronic thermostat 270°C

Steam extraction by air inlet

2 stainless steel levels shelves perforated of

800x600 spaced of 200

Drain valve 20/27 above the water vat

Insulation of the door and of the retort
 by ceramic fiber rot-proof

Options :

stand for r250 (X211001)

hinges on the left (X100120)

extra for chaging elec current in 3x220v (X100702)


grid stainless steel 600x400 (X900310)

grid stainless steel 800x600 (X900311)

pastry plate 600x400 (X900202)

roasting bac inox 600x400 (X900107)

roasting bac inox 800x600 (X900105)

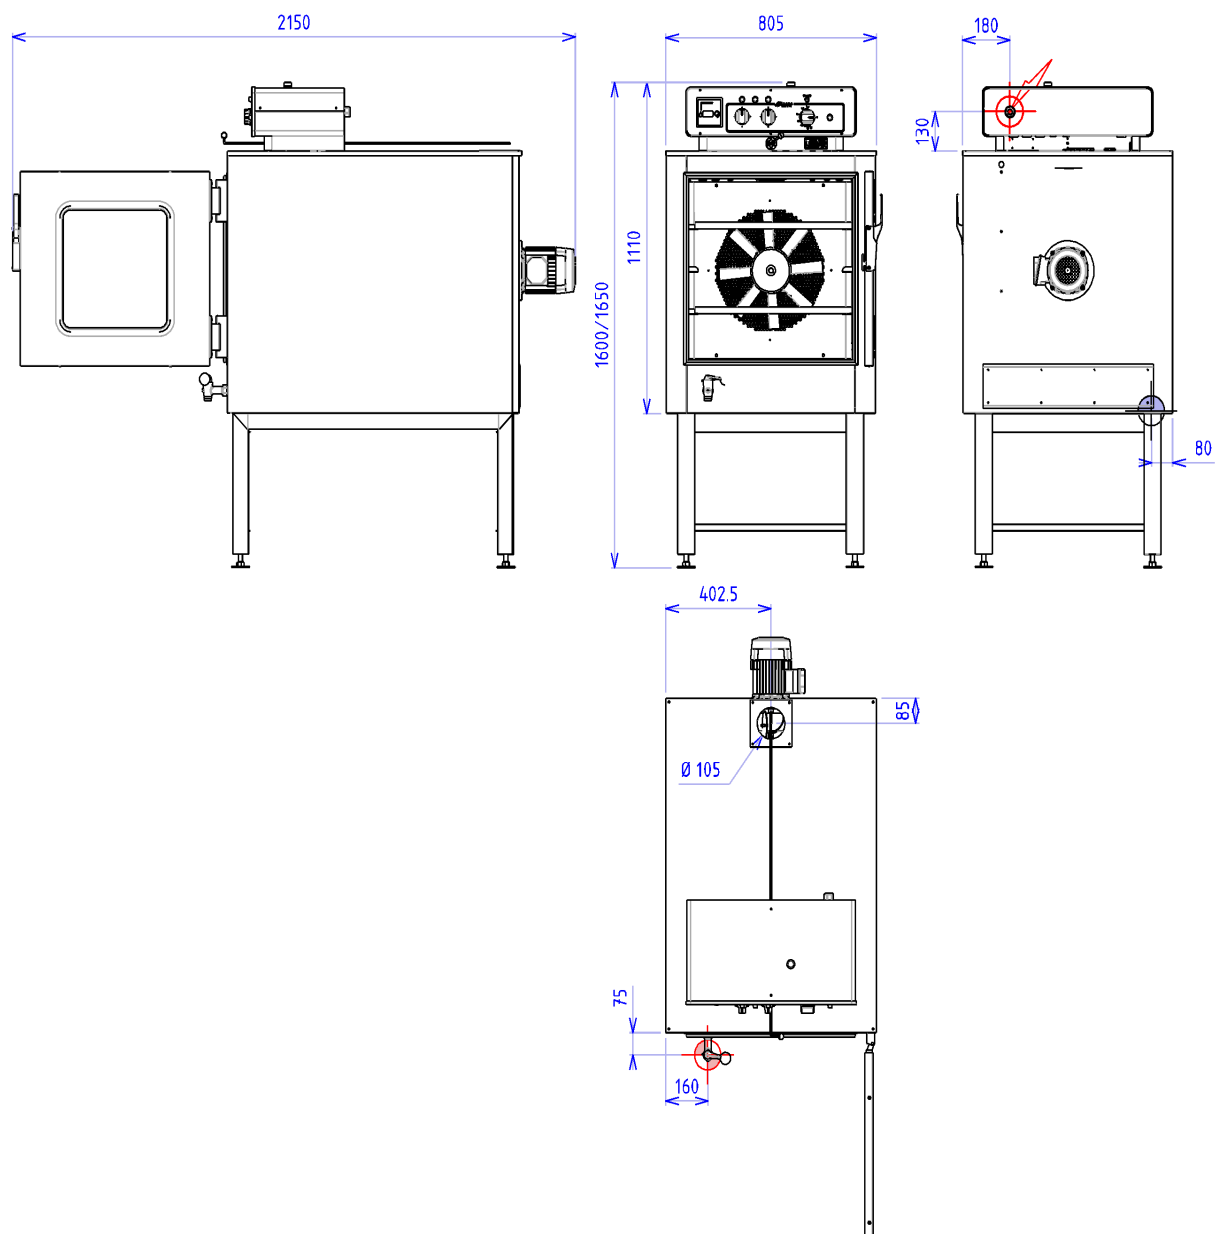

Electric power : 16.50kW

Elec Réserve : - Elec fitting : 400V THREE

Electrical devices standard to the norm EN 60-335